

AGREEMENT

CONCERNING THE ADOPTION OF UNIFORM CONDITIONS OF APPROVAL AND RECIPROCAL RECOGNITION OF APPROVAL FOR MOTOR VEHICLE EQUIPMENT AND PARTS

done at Geneva on 20 March 1958

Addendum 6 – Regulation No. 7

Revision 2 – Amendment 1

Supplement 2 to the 02 series of amendments
Date of entry into force: 26 January 1994

UNIFORM PROVISIONS CONCERNING THE APPROVAL OF FRONT AND REAR POSITION
(SIDE) LAMPS, STOP-LAMPS AND END-OUTLINE MARKER LAMPS FOR MOTOR VEHICLES
(EXCEPT MOTOR CYCLES) AND THEIR TRAILERS



UNITED NATIONS



Paragraph 1.3., amend to read:

"1.3. 'Stop-lamp' means the lamp used to indicate to other road-users to the rear of the vehicle that its driver is applying the service brake.
The stop-lamps may be activated by the application of a retarder or a similar device;"

Paragraph 1.7., correct to read:

"... and end-outline marker lamps of different types means lamps which differ ..."

Paragraph 2.2.4., correct to read:

"... for mounting only on the right or only on the left side ..."

Paragraph 4.1.5., correct the words "approved mark" to read "approval mark".

Paragraph 4.2.1.1., footnote 1/, amend to read:

"1/ 1 for ... 8 for the Czech Republic, ... 15 (vacant), 23 for Greece, 24, 25 (vacant), 26 for Slovenia and 27 for Slovakia. Subsequent numbers ..."

Paragraph 4.2.2.3., amend to read:

"4.2.2.3. on devices meeting the requirements of this Regulation in respect of the stop-lamps, the letter 'S' followed by the figure:

- '1' when the device has one level of illumination;
- '2' when the device has two levels of illumination;
- '3' when the device meets the specific requirements for category S3 stop lamps."

Paragraph 4.2.3., correct to read:

"... into force on 5 May 1991), which indicate ..."

Paragraph 6.1., amend the table to read:

"

<u>1/</u>	Minimum intensities cd	Maximum values in cd when used as		
		Single lamp	Lamp (single) marked 'D' (paragraph 4.5.2.6.)	Total for the assembly of two lamps (paragraph 4.5.2.6.)

6.1.4.1. with 1 level of intensity (category S1)
 6.1.4.2. with 2 levels of intensity (category S2)

6.1.4.3. stop-lamps of category S3	25	80	55	110
------------------------------------	----	----	----	-----


"

Annex 1

The initial clause, amend to read:

"The minimum vertical angles of light distribution in space are 15° above and 15° below the horizontal for all categories of devices included in this Regulation except for category S3 stop lamp for which they are 10° above and 5° below the horizontal."

In the figure "Minimum horizontal angles of light distribution in space," amend the title of the third diagram "Stop lamps" to read "Stop lamps (S1 and S2)" and add a new fourth diagram to read:

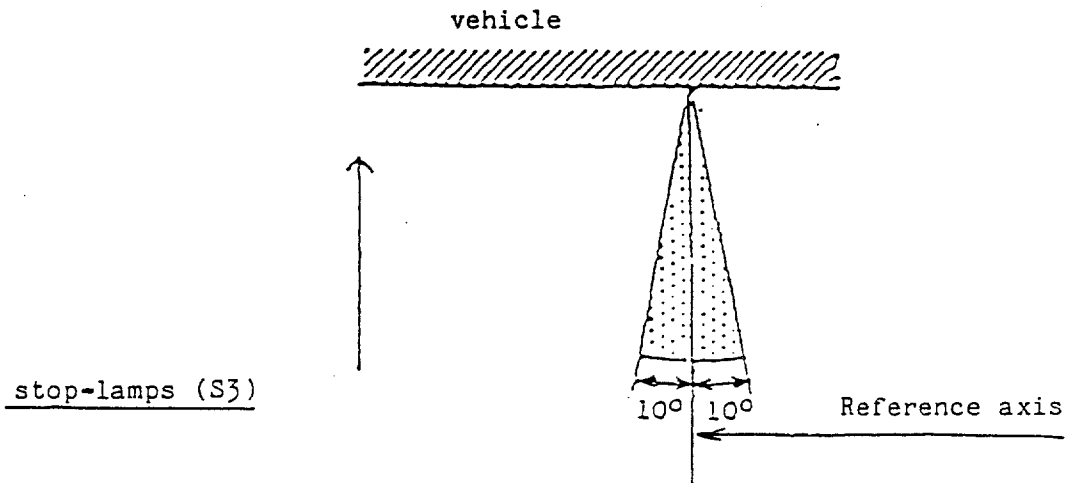

Annex 2, item 9, delete the indication "(2 x P21W)".

Annex 3, at the end of the Annex, insert the word "or" (three times) between the examples.

Annex 4, paragraph 2, add a second light distribution grid, to read as follows:

"Table of light distribution for category S3 stop-lamp"

10°	32	- -	64	- -	32
5°	64	100	100	100	64
0°	64	100	100	100	64
5°	64	100	100	100	64
<hr/>					
	10°	5°	0°	5°	10°"
