18 December 2003

### **AGREEMENT**

CONCERNING THE ADOPTION OF UNIFORM TECHNICAL PRESCRIPTIONS FOR WHEELED VEHICLES, EQUIPMENT AND PARTS WHICH CAN BE FITTED AND/OR BE USED ON WHEELED VEHICLES AND THE CONDITIONS FOR RECIPROCAL RECOGNITION OF APPROVALS GRANTED ON THE BASIS OF THESE PRESCRIPTIONS \*/

(Revision 2, including the amendments which entered into force on 16 October 1995)

**Addendum 35:** Regulation No. 36

**Revision 2 - Amendment 2** 

Supplement 8 to the 03 series of amendments - Date of entry into force: 30 October 2003

# UNIFORM PROVISIONS CONCERNING THE APPROVAL OF LARGE PASSENGER VEHICLES WITH REGARD TO THEIR GENERAL CONSTRUCTION

**UNITED NATIONS** 

Agreement Concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958.

<sup>\*/</sup> Former title of the Agreement:

E/ECE/324 Rev.1/Add.35/Rev.2/Amend.2 E/ECE/TRANS/505 Regulation No. 36 page 2

#### Paragraph 2.13., amend to read:

"2.13. "Gangway" means the space providing access by passengers from any seat or row of seats to any other seat or row of seats or to any access passage from or to any service door and any area for standing passengers; it does not include:"

#### Paragraph 2.13.2., amend to read:

"2.13.2. the space above the surface of any step or staircase at the doors, or"

Paragraph 5.7.5.1., the words "public service" should be deleted.


#### Paragraph 5.7.8.6.2.2., amend to read:

"5.7.8.6.2.2. Intrusion of a structural member provided that the intrusion is included within a triangle whose peak is situated 70 cm from the top and whose base is 10 cm in width and situated in the upper part of the space in question, adjacent to the side wall of the vehicle (see annex 3, figure 10);"

E/ECE/324 Rev.1/Add.35/Rev.2/Amend.2 E/ECE/TRANS/505 Regulation No. 36 page 3

## Annex 3, Figure 10, amend to read:

"Figure 10 PERMITTED INTRUSION OF A STRUCTURAL MEMBER

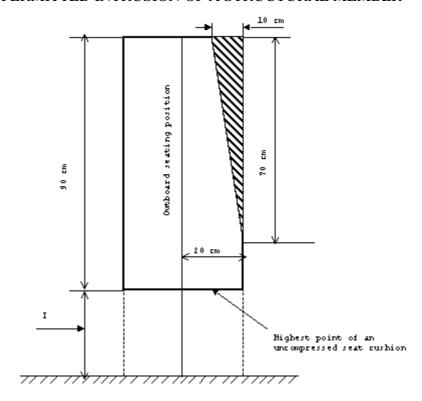

|           | I (cm) min.                |
|-----------|----------------------------|
| Class I   | 40-50                      |
|           | (for classes I and II min. |
| Class II  | 35 cm at wheel arches and  |
|           | engine compartment)        |
| Class III |                            |
|           |                            |

•