

UNECE

ATP **as amended on 22 June 2024**



**Agreement on the International Carriage of Perishable Foodstuffs
and on the Special Equipment to be Used for such Carriage**



UNITED NATIONS

Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be Used for such Carriage (ATP)



UNITED NATIONS

United Nations

Geneva, 2024

© 2024 United Nations

All rights reserved worldwide

Requests to reproduce excerpts or to photocopy should be addressed to the Copyright Clearance Center at copyright.com.

All other queries on rights and licenses, including subsidiary rights, should be addressed to:

United Nations Publications,
405 East 42nd Street, S-09FW001,
New York, NY 10017,
United States of America.
Email: permissions@un.org;
website: <https://shop.un.org>.

The designations employed and the presentation of material on any map in this work do not imply the expression of any opinion whatsoever on the part of the United Nations concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries.

United Nations publication issued by the United Nations Economic Commission for Europe.

ECE/TRANS/347

Sales No. E.24.VIII.3
ISBN: 978-92-1-139227-2
eISBN: 978-92-1-001913-2
ISSN: 2414-5165
eISSN: 2414-5491

UNITED NATIONS ECONOMIC COMMISSION FOR EUROPE (UNECE)

The United Nations Economic Commission for Europe (UNECE) is one of the five United Nations regional commissions, administered by the Economic and Social Council (ECOSOC). It was established in 1947 with the mandate to help rebuild post-war Europe, develop economic activity and strengthen economic relations among European countries, and between Europe and the rest of the world. During the Cold War, UNECE served as a unique forum for economic dialogue and cooperation between East and West. Despite the complexity of this period, significant achievements were made, with consensus reached on numerous harmonization and standardization agreements.

In the post-Cold War era, UNECE acquired not only many new member States, but also new functions. Since the early 1990s the organization has focused on assisting the countries of Central and Eastern Europe, Caucasus and Central Asia with their transition process and their integration into the global economy.

Today, UNECE supports its 56 member States in Europe, Central Asia and North America in the implementation of the 2030 Agenda for Sustainable Development with its Sustainable Development Goals (SDGs). UNECE provides a multilateral platform for policy dialogue, the development of international legal instruments, norms and standards, the exchange of best practices and economic and technical expertise, as well as technical cooperation for countries with economies in transition.

Offering practical tools to improve people's everyday lives in the areas of environment, transport, trade, statistics, energy, forestry, housing, and land management, many of the norms, standards and conventions developed in UNECE are used worldwide, and a number of countries from outside the region participate in UNECE's work.

UNECE's multisectoral approach helps countries to tackle the interconnected challenges of sustainable development in an integrated manner, with a transboundary focus that helps devise solutions to shared challenges. With its unique convening power, UNECE fosters cooperation among all stakeholders at the country and regional levels.

TRANSPORT IN UNECE

The UNECE Sustainable Transport Division is the secretariat of the Inland Transport Committee (ITC) and the ECOSOC Committee of Experts on the Transport of Dangerous Goods and on the Globally Harmonized System of Classification and Labelling of Chemicals. The ITC and its 17 working parties, as well as the ECOSOC Committee and its sub-committees are intergovernmental decision-making bodies that work to improve the daily lives of people and businesses around the world, in measurable ways and with concrete actions, to enhance traffic safety, environmental performance, energy efficiency and the competitiveness of the transport sector.

The ECOSOC Committee was set up in 1953 by the Secretary-General of the United Nations at the request of the Economic and Social Council to elaborate recommendations on the transport of dangerous goods. Its mandate was extended to the global (multi-sectoral) harmonization of systems of classification and labelling of chemicals in 1999. It is composed of experts from countries which possess the relevant expertise and experience in the international trade and transport of dangerous goods and chemicals. Its membership is restricted in order to reflect a proper geographical balance between all regions of the world and to ensure adequate participation of developing countries. Although the Committee is a subsidiary body of ECOSOC, the Secretary-General decided in 1963 that the secretariat services would be provided by the UNECE Transport Division.

ITC is a unique intergovernmental forum that was set up in 1947 to support the reconstruction of transport connections in post-war Europe. Over the years, it has specialized in facilitating the harmonized and sustainable development of inland modes of transport. The main results of this persevering and ongoing work are reflected, among other things, (i) in 59 United Nations conventions and many more technical regulations, which are updated on a regular basis and provide an international legal framework for the sustainable development of national and international road, rail, inland water and intermodal transport, including the transport of dangerous goods, as well as the construction and inspection of road motor vehicles; (ii) in the Trans-European North-south Motorway, Trans-European Railway and the Euro-Asia Transport Links projects, that facilitate multi-country coordination of transport infrastructure investment programmes; (iii) in the TIR system, which is a global customs transit facilitation solution; (iv) in the tool called For Future Inland Transport Systems (ForFITS), which can assist national and local governments to monitor carbon dioxide (CO₂) emissions coming from inland transport modes and to select and design climate change mitigation policies, based on their impact and adapted to local conditions; (v) in transport statistics – methods and data – that are internationally agreed on; (vi) in studies and reports that help transport policy development by addressing timely issues, based on cutting-edge research and analysis. ITC also devotes special attention to Intelligent Transport Services (ITS), sustainable urban mobility and city logistics, as well as to increasing the resilience of transport networks and services in response to climate change adaptation and security challenges.

In addition, the UNECE Sustainable Transport and Environment Divisions, together with the World Health Organization (WHO) – Europe, co-service the Transport Health and Environment Pan-European Programme (THE PEP).

INTRODUCTION

The Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be Used for such Carriage (ATP) done at Geneva on 1 September 1970 entered into force on 21 November 1976.

The Agreement and its annexes have been regularly amended and updated since their entry into force by the Working Party on the Transport of Perishable Foodstuffs (WP.11) of the Economic Commission for Europe's Inland Transport Committee.

Territorial applicability

The ATP is an Agreement between States, and there is no overall enforcing authority. In practice, highway checks are carried out by Contracting Parties, and non-compliance may then result in legal action by national authorities against offenders in accordance with their domestic legislation. ATP itself does not prescribe any penalties. At the time of publishing, those Contracting Parties are Albania, Andorra, Austria, Azerbaijan, Belarus, Belgium, Bosnia and Herzegovina, Bulgaria, Croatia, Czechia, Denmark, Estonia, Finland, France, Georgia, Germany, Greece, Hungary, Ireland, Islamic Republic of Iran, Italy, Kazakhstan, Kyrgyzstan, Latvia, Lithuania, Luxembourg, Monaco, Montenegro, Morocco, Netherlands, North Macedonia, Norway, Poland, Portugal, Republic of Moldova, Romania, Russian Federation, San Marino, Saudi Arabia, Serbia, Slovakia, Slovenia, Spain, Sweden, Tajikistan, Tunisia, Türkiye, Ukraine, United Kingdom of Great Britain and Northern Ireland, United States of America and Uzbekistan.

Additional practical information

Any query concerning the application of ATP should be directed to the relevant competent authority. Additional information may also be found on the UNECE Sustainable Transport Division web site at the following link:

<https://unece.org/text-and-status-agreement>

This information, updated on a continuous basis, concerns:

- The status of ATP;
- Depositary notifications (e.g. new Contracting Parties, amendments or corrections to legal texts);
- Publication details (corrections, publication of new amendments);
- List and details of competent authorities and ATP Test Stations.

The text below comprises the Agreement itself and its annexes with the latest amendments which enter into force on 22 June 2024.

The amendments or corrections to the Agreement which have become applicable since the last edition of this publication are in Annex 1 Appendix 1, Annex 1 Appendix 2, Model Test Reports of Annex 1 Appendix 2 and Annex 1 Appendix 3.

CONTENTS

AGREEMENT ON THE INTERNATIONAL CARRIAGE OF PERISHABLE FOODSTUFFS AND ON THE SPECIAL EQUIPMENT TO BE USED FOR SUCH CARRIAGE (ATP)	1
Annex 1	8
Definitions of and standards for special equipment for the carriage of perishable foodstuffs ...	8
1. Insulated equipment.....	8
2. Refrigerated equipment.....	8
3. Mechanically refrigerated equipment.....	9
4. Heated equipment.....	9
5. Mechanically refrigerated and heated equipment	9
6. Transitional measures.....	10
7. Definitions.....	10
Annex 1, Appendix 1	11
Provisions relating to the checking of insulated, refrigerated, mechanically refrigerated, heated or mechanically refrigerated and heated equipment for compliance with the standards	11
Annex 1, Appendix 2.....	15
Methods and procedures for measuring and checking the insulating capacity and the efficiency of the cooling or heating appliances of special equipment for the carriage of perishable foodstuffs	15
1. Definitions and general principles.....	15
2. Insulating capacity of equipment	18
3. Effectiveness of thermal appliances of equipment.....	21
4. Procedure for measuring the effective refrigerating capacity W_o of a unit when the evaporator is free from frost.....	26
5. Checking the insulating capacity of equipment in service.....	30
6. Verifying the effectiveness of thermal appliances of equipment in service.....	31
7. Procedure for measuring the capacity of mechanical multi-temperature refrigeration units and dimensioning multi-compartment equipment	35
8. Test Reports.....	40
Models of test reports	
MODEL No. 1 A.....	40
MODEL No. 1 B	42
MODEL No. 2 A.....	44
MODEL No. 2 B	46
MODEL No. 3.....	48
MODEL No. 4 A.....	49

MODEL No. 4 B	51
MODEL No. 4 C	54
MODEL No. 5	56
MODEL No. 6	58
MODEL No. 7	60
MODEL No. 8	63
MODEL No. 9	65
MODEL No. 10	67
MODEL No. 11	69
MODEL No. 12	71
MODEL No. 13	77
MODEL No. 14	81
9. Procedure for measuring the capacity of liquefied gas units and dimensioning the equipment that uses these units	83
Annex 1, Appendix 3	87
A. Model form of certificate of compliance of the equipment, as prescribed in Annex 1, Appendix 1, paragraph 3	87
B. Certification plate of compliance of the equipment, as provided for in Annex 1, Appendix 1, paragraph 3	90
Annex 1, Appendix 4	91
Distinguishing marks to be affixed to special equipment	91
Annex 2	93
Selection of equipment and temperature conditions to be observed for the carriage of quick (deep)-frozen and frozen foodstuffs	93
Annex 2, Appendix 1	94
Monitoring of air temperature for transport of quick-frozen perishable foodstuffs	94
Annex 2, Appendix 2	95
Procedure for the sampling and measurement of temperature for carriage of chilled, frozen and quick-frozen perishable foodstuffs	95
A. General considerations	95
B. Sampling	95
C. Temperature measurement of perishable foodstuffs	96
D. General specifications for the measuring system	96
E. Allowable tolerances in the measurement of temperature	97
Annex 3	98
Selection of equipment and temperature conditions to be observed for the carriage of chilled foodstuffs	98

AGREEMENT ON THE INTERNATIONAL CARRIAGE OF PERISHABLE FOODSTUFFS AND ON THE SPECIAL EQUIPMENT TO BE USED FOR SUCH CARRIAGE (ATP)

THE CONTRACTING PARTIES,

DESIROUS of improving the conditions of preservation of the quality of perishable foodstuffs during their carriage, particularly in international trade,

CONSIDERING that the improvement of those conditions is likely to promote the expansion of trade in perishable foodstuffs,

HAVE AGREED as follows:

Chapter I

SPECIAL TRANSPORT EQUIPMENT

Article 1

For the international carriage of perishable foodstuffs, equipment shall not be designated as 'insulated', 'refrigerated', 'mechanically refrigerated', 'heated' or 'mechanically refrigerated and heated' equipment unless it complies with the definitions and standards set forth in annex 1 to this Agreement.

Article 2

The Contracting Parties shall take the measures necessary to ensure that the equipment referred to in article 1 of this Agreement is inspected and tested for compliance with the said standards in conformity with the provisions of annex 1, appendices 1, 2, 3 and 4, to this Agreement. Each Contracting Party shall recognize the validity of certificates of compliance issued in conformity with annex 1, appendix 1, paragraph 3 to this Agreement by the competent authority of another Contracting Party. Each Contracting Party may recognize the validity of certificates of compliance issued in conformity with the requirements of annex 1, appendices 1 and 2, to this Agreement by the competent authority of a State not a Contracting Party.

Chapter II

USE OF SPECIAL TRANSPORT EQUIPMENT FOR THE INTERNATIONAL CARRIAGE OF CERTAIN PERISHABLE FOODSTUFFS

Article 3

1. The provisions of article 4 of this Agreement shall apply to all carriage, whether for hire or reward or for own account, carried out exclusively subject to the provisions of paragraph 2 of this article by rail, by road or by a combination of the two, of

- quick (deep)-frozen and frozen foodstuffs, and of
- foodstuffs referred to in annex 3 to this Agreement even if they are neither quick (deep)-frozen nor frozen,

if the point at which the goods are, or the equipment containing them is, loaded on to a rail or road vehicle and the point at which the goods are, or the equipment containing them is, unloaded from that vehicle are in two different States and the point at which the goods are unloaded is situated in the territory of a Contracting Party.

In the case of carriage entailing one or more sea crossings other than sea crossings as referred to in paragraph 2 of this article, each land journey shall be considered separately.

2. The provisions of paragraph 1 of this article shall likewise apply to sea crossings of less than 150 km on condition that the goods are shipped in equipment used for the land journey or journeys without transloading of the goods and that such crossings precede or follow one or more land journeys as referred to in paragraph 1 of this article or take place between two such land journeys.
3. Notwithstanding the provisions of paragraphs 1 and 2 of this article, the Contracting Parties need not apply the provisions of article 4 of this Agreement to the carriage of foodstuffs not intended for human consumption.

Article 4

1. For the carriage of the perishable foodstuffs specified in annexes 2 and 3 to this Agreement, the equipment referred to in article 1 of this Agreement shall be used unless the temperatures to be anticipated throughout carriage render this requirement manifestly unnecessary for the purpose of maintaining the temperature conditions specified in annexes 2 and 3 to this Agreement. The equipment shall be so selected and used that the temperature conditions prescribed in the said annexes can be complied with throughout carriage. Furthermore, all appropriate measures shall be taken, more particularly as regards the temperature of the foodstuffs at the time of loading and as regards icing or re-icing during the journey or other necessary operations. Nevertheless, the provisions of this paragraph shall apply only in so far as they are not incompatible with international undertakings in the matter of international carriage arising for the Contracting Parties by virtue of conventions in force at the time of the entry into force of this Agreement or by virtue of conventions substituted for them.
2. If during carriage under this Agreement the provisions of paragraph 1 of this article have not been complied with,
 - (a) the foodstuffs may not be disposed of in the territory of a Contracting Party after completion of carriage unless the competent authorities of that Contracting Party deem it compatible with the requirements of public health to authorize such disposal and unless such conditions as the authorities may attach to the authorization when granting it are fulfilled; and
 - (b) every Contracting Party may, by reason of the requirements of public health or zooprophyllaxis and in so far as it is not incompatible with the other international undertakings referred to in the last sentence of paragraph 1 of this article, prohibit the entry of the foodstuffs into its territory or make their entry subject to such conditions as it may determine.
3. Compliance with the provisions of paragraph 1 of this article shall be required of carriers for hire or reward only in so far as they have undertaken to procure or provide services intended to ensure such compliance and if such compliance depends on the performance of those services. If other persons, whether individuals or corporate bodies, have undertaken to procure or provide services intended to ensure compliance with the provisions of this Agreement, they shall be required to ensure such compliance in so far as it depends on performance of the services they have undertaken to procure or provide.
4. During carriage which is subject to the provisions of this Agreement and for which the loading point is situated in the territory of a Contracting Party, responsibility for compliance with the requirements of paragraph 1 of this article shall rest, subject to the provisions of paragraph 3 of this article,
 - in the case of transport for hire or reward, with the person, whether an individual or a corporate body, who is the consignor according to the transport document or, in the absence of a transport document, with the person, whether an individual or a corporate body, who has entered into the contract of carriage with the carrier;
 - in other cases with the person, whether an individual or a corporate body, who performs carriage.

Chapter III

MISCELLANEOUS PROVISIONS

Article 5

The provisions of this Agreement shall not apply to carriage in containers classified as thermal maritime by land without transloading of the goods where such carriage is preceded or followed by a sea crossing other than a sea crossing as referred to in article 3, paragraph 2, of this Agreement.

Article 6

1. Each Contracting Party shall take all appropriate measures to ensure observance of the provisions of this Agreement. The competent administrations of the Contracting Parties shall keep one another informed of the general measures taken for this purpose.
2. If a Contracting Party discovers a breach committed by a person residing in the territory of another Contracting Party, or imposes a penalty upon such a person, the administration of the first Party shall inform the administration of the other Party of the breach discovered and of the penalty imposed.

Article 7

The Contracting Parties reserve the right to enter into bilateral or multilateral agreements to the effect that provisions applicable to special equipment and provisions applicable to the temperatures at which certain foodstuffs are required to be maintained during carriage may, more particularly by reason of special climatic conditions, be more stringent than those prescribed in this Agreement. Such provisions shall apply only to international carriage between Contracting Parties which have concluded bilateral or multilateral agreements as referred to in this article. Such agreements shall be transmitted to the Secretary-General of the United Nations, who shall communicate them to Contracting Parties to this Agreement which are not signatories of the said agreements.

Article 8

Failure to observe the provisions of this Agreement shall not affect either the existence or the validity of contracts entered into for the performance of carriage.

Chapter IV

FINAL PROVISIONS

Article 9

1. States members of the Economic Commission for Europe and States admitted to the Commission in a consultative capacity under paragraph 8 of the Commission's terms of reference may become Contracting Parties to this Agreement
 - (a) by signing it;
 - (b) by ratifying it after signing it subject to ratification; or
 - (c) by acceding to it.
2. States which may participate in certain activities of the Economic Commission for Europe under paragraph 11 of the Commission's terms of reference may become Contracting Parties to this Agreement by acceding thereto after its entry into force.
3. This Agreement shall be open for signature until 31 May 1971 inclusive. Thereafter, it shall be open for accession.
4. Ratification or accession shall be effected by the deposit of an instrument with the Secretary-General of the United Nations.

Article 10

1. Any State may at the time of signing this Agreement without reservation as to ratification or of depositing its instrument of ratification or accession or at any time thereafter declare by notification addressed to the Secretary-General of the United Nations that the Agreement does not apply to carriage performed in any or in a particular one of its territories situated outside Europe. If notification as aforesaid is made after the entry into force of the Agreement in respect of the notifying State the Agreement shall, ninety days after the date on which the Secretary-General has received the notification, cease to apply to carriage in the territory or territories named in that notification. New Contracting Parties acceding to ATP as from 30 April 1999 and applying paragraph 1 of this article shall not be entitled to enter any objection to draft amendments in accordance with the procedure provided for in article 18, paragraph 2.
2. Any State which has made a declaration under paragraph 1 of this article may at any time thereafter declare by notification addressed to the Secretary-General of the United Nations that the Agreement will be applicable to carriage performed in a territory named in the notification made under paragraph 1 of this article and the Agreement shall become applicable to carriage in that territory one hundred and eighty days after the date on which the Secretary-General has received that notification.

Article 11

1. This Agreement shall come into force one year after five of the States referred to in its article 9, paragraph 1, have signed it without reservation as to ratification or have deposited their instruments of ratification or accession.
2. With respect to any State which ratifies, or accedes to, this Agreement after five States have signed it without reservation as to ratification or have deposited their instruments of ratification or accession, this Agreement shall enter into force one year after the said State has deposited its instrument of ratification or accession.

Article 12

1. Any Contracting Party may denounce this Agreement by giving notice of denunciation to the Secretary-General of the United Nations.
2. The denunciation shall take effect fifteen months after the date on which the Secretary-General received the notice of denunciation.

Article 13

This Agreement shall cease to have effect if the number of Contracting Parties is less than five throughout any period of twelve consecutive months after its entry into force.

Article 14

1. Any State may at the time of signing this Agreement without reservation as to ratification or of depositing its instrument of ratification or accession or at any time thereafter declare by notification addressed to the Secretary-General of the United Nations that this Agreement will be applicable to all or any of the territories for the international relations of which that State is responsible. This Agreement shall be applicable to the territory or territories named in the notification as from the ninetieth day after receipt of the notice by the Secretary-General or, if on that day the Agreement has not yet entered into force, as from its entry into force.
2. Any State which has made a declaration under paragraph 1 of this article making this Agreement applicable to a territory for whose international relations it is responsible may denounce the Agreement separately in respect of that territory in conformity with article 12 hereof.

Article 15

1. Any dispute between two or more Contracting Parties concerning the interpretation or application of this Agreement shall so far as possible be settled by negotiation between them.

2. Any dispute which is not settled by negotiation shall be submitted to arbitration if any one of the Contracting Parties concerned in the dispute so requests and shall be referred accordingly to one or more arbitrators selected by agreement between those Parties. If within three months from the date of the request for arbitration, the Parties concerned in the dispute are unable to agree on the selection of an arbitrator or arbitrators, any of those Parties may request the Secretary-General of the United Nations to designate a single arbitrator to whom the dispute shall be referred for decision.
3. The decision of the arbitrator or arbitrators designated under the preceding paragraph shall be binding on the Contracting Parties concerned in the dispute.

Article 16

1. Any State may, at the time of signing, ratifying, or acceding to, this Agreement, declare that it does not consider itself bound by article 15, paragraphs 2 and 3 of this Agreement. The other Contracting Parties shall not be bound by these paragraphs with respect to any Contracting Party which has entered such a reservation.
2. Any Contracting Party which has entered a reservation under paragraph 1 of this article may at any time withdraw the reservation by notification addressed to the Secretary-General of the United Nations.
3. With the exception of the reservation provided for in paragraph 1 of this article, no reservation to this Agreement shall be permitted.

Article 17

1. After this Agreement has been in force for three years, any Contracting Party may, by notification addressed to the Secretary-General of the United Nations, request that a conference be convened for the purpose of revising this Agreement. The Secretary-General shall notify all Contracting Parties of the request and a revision conference shall be convened by the Secretary-General if, within a period of four months from the date of the notification sent by the Secretary-General, not less than one third of the Contracting Parties signify their assent to the request.
2. If a conference is convened in pursuance of paragraph 1 of this article, the Secretary-General shall so advise all the Contracting Parties and invite them to submit within a period of three months, the proposals which they wish the conference to consider. The Secretary-General shall circulate the provisional agenda for the conference, together with the text of such proposals, to all Contracting Parties not less than three months before the date on which the conference is to open.
3. The Secretary-General shall invite to any conference convened in pursuance of this article all the countries referred to in article 9, paragraph 1, of this Agreement, and also the countries which have become Contracting Parties under the said article 9, paragraph 2.

Article 18

1. Any Contracting Party may propose one or more amendments to this Agreement. The text of any proposed amendment shall be communicated to the Secretary-General of the United Nations, who shall communicate it to all Contracting Parties and bring it to the notice of all the other States referred to in article 9, paragraph 1, of this Agreement.

The Secretary-General may also propose amendments to this Agreement or to its annexes which have been transmitted to him by the Working Party on the Transport of Perishable Foodstuffs of the Inland Transport Committee of the Economic Commission for Europe.

2. Within a period of six months following the date on which the proposed amendment is communicated by the Secretary-General, any Contracting Party may inform the Secretary-General
 - (a) that it has an objection to the amendment proposed, or
 - (b) that, although it intends to accept the proposal, the conditions necessary for such acceptance are not yet fulfilled in its country.

3. If a Contracting Party sends the Secretary-General a communication as provided for in paragraph 2 (b) of this article, it may, so long as it has not notified the Secretary-General of its acceptance, submit an objection to the proposed amendment within a period of nine months following the expiry of the period of six months prescribed in respect of the initial communication.
4. If an objection to the proposed amendment is stated in accordance with the terms of paragraphs 2 and 3 of this article, the amendment shall be deemed not to have been accepted and shall be of no effect.
5. If no objection to the proposed amendment has been stated in accordance with paragraphs 2 and 3 of this article, the amendment shall be deemed to have been accepted on the date specified below:
 - (a) if no Contracting Party has sent a communication to the Secretary-General in accordance with paragraph 2 (b) of this article, on the expiry of the period of six months referred to in paragraph 2 of this article;
 - (b) if at least one Contracting Party has sent a communication to the Secretary-General in accordance with paragraph 2 (b) of this article, on the earlier of the following two dates:
 - the date by which all the Contracting Parties which sent such communications have notified the Secretary-General of their acceptance of the proposed amendment, subject however to the proviso that if all the acceptances were notified before the expiry of the period of six months referred to in paragraph 2 of this article the date shall be the date of expiry of that period;
 - the date of expiry of the period of nine months referred to in paragraph 3 of this article.
6. Any amendment deemed to be accepted shall enter into force six months after the date on which it was deemed to be accepted.
7. The Secretary-General shall as soon as possible inform all Contracting Parties whether an objection to the proposed amendment has been stated in accordance with paragraph 2 (a) of this article and whether one or more Contracting Parties have sent him a communication in accordance with paragraph 2 (b) of this article. If one or more Contracting Parties have sent him such a communication, he shall subsequently inform all the Contracting Parties whether the Contracting Party or Parties which have sent such a communication raise an objection to the proposed amendment or accept it.
8. Independently of the amendment procedure laid down in paragraphs 1 to 6 of this article, the annexes and appendices to this Agreement may be modified by agreement between the competent administrations of all the Contracting Parties. If the administration of a Contracting Party has stated that under its national law its agreement is contingent on special authorization or on the approval of a legislative body, the consent of the Contracting Party concerned to the modification of an annex shall not be deemed to have been given until the Contracting Party has notified the Secretary-General that the necessary authorization or approval has been obtained. The agreement between the competent administrations may provide that, during a transitional period, the old annexes shall remain in force, wholly or in part, concurrently with the new annexes. The Secretary-General shall specify the date of the entry into force of the new texts resulting from such modifications.

Article 19

In addition to communicating to them the notifications provided for in articles 17 and 18 of this Agreement, the Secretary-General of the United Nations shall notify the States referred to in article 9, paragraph 1, of this Agreement and the States which have become Contracting Parties under article 9, paragraph 2, of:

- (a) signatures, ratifications and accessions under article 9;
- (b) the dates of entry into force of this Agreement pursuant to article 11;
- (c) denunciations under article 12;
- (d) the termination of this Agreement under article 13;
- (e) notifications received under articles 10 and 14;

- (f) declarations and notifications received under article 16, paragraphs 1 and 2;
- (g) the entry into force of any amendment pursuant to article 18.

Article 20

After 31 May 1971, the original of this Agreement shall be deposited with the Secretary-General of the United Nations, who shall transmit certified true copies to each of the States mentioned in article 9, paragraphs 1 and 2, of this Agreement.

IN WITNESS WHEREOF, the undersigned, being duly authorized thereto, have signed this Agreement.

DONE at Geneva, this first day of September, one thousand nine hundred and seventy, in a single copy, in the English, French and Russian languages, the three texts being equally authentic.

Annex 1

DEFINITIONS OF AND STANDARDS FOR SPECIAL EQUIPMENT ¹ FOR THE CARRIAGE OF PERISHABLE FOODSTUFFS

1. **Insulated equipment.** Equipment of which the body² is built with rigid* insulating walls, doors, floor and roof, by which heat exchanges between the inside and outside of the body can be so limited that the overall coefficient of heat transfer (K coefficient) is such that the equipment is assignable to one or other of the following two categories:

I_N = Normally insulated equipment specified by: – a K coefficient equal to or less than $0.70 \text{ W/m}^2 \cdot ^\circ\text{C}$;

I_R = Heavily insulated equipment specified by: – a K coefficient equal to or less than $0.40 \text{ W/m}^2 \cdot ^\circ\text{C}$ and by side-walls with a thickness of at least 45 mm for transport equipment of a width greater than 2.50 m.

The definition of the K coefficient and a description of the method to be used in measuring it are given in appendix 2 to this annex.

2. **Refrigerated equipment.** Insulated equipment which, using a source of cold (natural ice, with or without the addition of salt; eutectic plates; dry ice, with or without sublimation control; liquefied gases, with or without evaporation control, etc.) other than a mechanical or “absorption” unit, is capable, with a mean outside temperature of $+ 30 \text{ }^\circ\text{C}$, of lowering the temperature inside the empty body to, and thereafter maintaining it:

At $+ 7 \text{ }^\circ\text{C}$ maximum in the case of class A;

At $-10 \text{ }^\circ\text{C}$ maximum in the case of class B;

At $-20 \text{ }^\circ\text{C}$ maximum in the case of class C; and

At $0 \text{ }^\circ\text{C}$ maximum in the case of class D.

If such equipment includes one or more compartments, receptacles or tanks for the refrigerant, the said compartments, receptacles or tanks shall:

be capable of being filled or refilled from the outside; and

have a capacity in conformity with the provisions of annex I, appendix 2, paragraph 3.1.3.

The K coefficient of refrigerated equipment of classes B and C shall in every case be equal to or less than $0.40 \text{ W/m}^2 \cdot ^\circ\text{C}$.

¹ Wagons, lorries, trailers, semi trailers, containers and other similar equipment.

² In the case of tank equipment, the term “body” means under this definition, the tank itself.

* Rigid in this case refers to non-flexible continuous or non-continuous surfaces, for example full solid walls or roller-shutter doors.

3. **Mechanically refrigerated equipment.** Insulated equipment either fitted with its own refrigerating appliance, or served jointly with other units of transport equipment by such an appliance (fitted with either a mechanical compressor, or an “absorption” device, etc.). The appliance shall be capable, with a mean outside temperature of + 30 °C, of lowering the temperature T_i inside the empty body to, and thereafter maintaining it continuously in the following manner at:

In the case of classes A, B and C, any desired practically constant inside temperature T_i in conformity with the standards defined below for the three classes:

Class A. Mechanically refrigerated equipment fitted with a refrigerating appliance such that T_i may be chosen between + 12 °C and 0 °C inclusive;

Class B. Mechanically refrigerated equipment fitted with a refrigerating appliance such that T_i may be chosen between + 12 °C and –10 °C inclusive;

Class C. Mechanically refrigerated equipment fitted with a refrigerating appliance such that T_i may be chosen between + 12 °C and –20 °C inclusive.

In the case of classes D, E and F a fixed practically constant inside temperature T_i in conformity with the standards defined below for the three classes:

Class D. Mechanically refrigerated equipment fitted with a refrigerating appliance such that T_i is equal to or less than 0 °C;

Class E. Mechanically refrigerated equipment fitted with a refrigerating appliance such that T_i is equal to or less than –10 °C;

Class F. Mechanically refrigerated equipment fitted with a refrigerating appliance such that T_i is equal to or less than –20 °C.

The K coefficient of equipment of classes B, C, E and F shall in every case be equal to or less than 0.40 W/m²·°C.

4. **Heated equipment.** Insulated equipment, which is capable of raising the inside temperature of the empty body to, and thereafter maintaining it for not less than 12 hours without renewal of supply at, a practically constant value of not less than + 12 °C when the mean outside temperature, is as indicated below:

–10 °C in the case of class A heated equipment;

–20 °C in the case of class B heated equipment;

–30 °C in the case of class C heated equipment;

–40 °C in the case of class D heated equipment.

Heat producing appliances shall have a capacity in conformity with the provisions of annex 1, appendix 2, paragraphs 3.3.1 to 3.3.5.

The K coefficient of equipment of classes B, C and D shall in every case be equal to or less than 0.40 W/m²·°C.

5. **Mechanically refrigerated and heated equipment.** Insulated equipment either fitted with its own refrigerating appliance, or served jointly with other units of transport equipment by such an appliance (fitted with either a mechanical compressor, or an ‘absorption’ device, etc.), and heating (fitted with electric heaters, etc.) or refrigerating-heating units capable both of lowering the temperature T_i inside the empty body and thereafter maintaining it continuously, and of raising the temperature and thereafter maintaining it for not less than 12 hours without renewal of supply at a practically constant value, as indicated below.

Class A: T_i may be chosen between + 12 °C and 0 °C inclusive at a mean outside temperature between –10 °C and +30 °C.

Class B: T_i may be chosen between + 12 °C and 0 °C inclusive at a mean outside temperature between –20 °C and +30 °C.

Class C: T_i may be chosen between + 12 °C and 0 °C inclusive at a mean outside temperature between –30 °C and +30 °C.

Class D: T_i may be chosen between + 12 °C and 0 °C inclusive at a mean outside temperature between –40 °C and +30 °C.

Class E: T_i may be chosen between + 12 °C and –10 °C inclusive at a mean outside temperature between –10 °C and +30 °C.

Class F: T_i may be chosen between + 12 °C and –10 °C inclusive at a mean outside temperature between –20 °C and +30 °C.

Class G: T_i may be chosen between + 12 °C and –10 °C inclusive at a mean outside temperature between –30 °C and +30 °C.

Class H: T_i may be chosen between + 12 °C and –10 °C inclusive at a mean outside temperature between –40 °C and +30 °C.

Class I: T_i may be chosen between + 12 °C and –20 °C inclusive at a mean outside temperature between –10 °C and +30 °C.

Class J: T_i may be chosen between + 12 °C and –20 °C inclusive at a mean outside temperature between –20 °C and +30 °C.

Class K: T_i may be chosen between + 12 °C and –20 °C inclusive at a mean outside temperature between –30 °C and +30 °C.

Class L: T_i may be chosen between + 12 °C and –20 °C inclusive at a mean outside temperature between –40 °C and +30 °C.

The K coefficient of equipment of classes B, C, D, E, F, G, H, I, J, K and L shall in every case be equal to or less than 0.40 W/m²·°C.

Heat producing or refrigerating-heating appliances when in heating mode shall have a capacity in conformity with the provisions of annex 1, appendix 2, paragraphs 3.4.1 to 3.4.5.

6. Transitional measures

- 6.1 Insulated bodies with non-rigid walls which first came into service before the amendment of paragraph 1 of annex 1 entered into force on 6 January 2018 may continue to be used for the carriage of perishable foodstuffs of the appropriate classification until the validity of the certificate of compliance expires. The validity of the certificate shall not be extended.

7. Definitions

Equipment means an assembly of parts forming an insulated body and its supportive structure needed for carriage on road and rail. Thermal appliances may be part of the assembly.

Heating appliance means a thermal appliance that generates thermal energy to increase (heat) the temperature inside.

Mechanically heated and refrigerated appliance means a mechanical refrigerating appliance that is able to decrease (cool) or increase (heat) the temperature inside the equipment that is tested to certify both the capacity to cool and to heat.

Mechanically refrigerating appliance means a thermal appliance that generates thermal energy to decrease (cool) the temperature inside the equipment by a mechanical drive system.

Refrigerating appliance means a thermal appliance that generates thermal energy to decrease (cool) the temperature inside the equipment by melting, evaporation or sublimation of for example natural ice, brine (eutectic) liquefied gas or dry ice.

Thermal appliance means a device to generate thermal energy, to decrease (cool) or increase (heat) the temperature inside the equipment.

Annex 1, Appendix 1

PROVISIONS RELATING TO THE CHECKING OF INSULATED, REFRIGERATED, MECHANICALLY REFRIGERATED, HEATED OR MECHANICALLY REFRIGERATED AND HEATED EQUIPMENT FOR COMPLIANCE WITH THE STANDARDS

1. Checks for conformity with the standards prescribed in this annex shall be made:

- (a) before equipment enters into service;
- (b) periodically, at least once every six years; and
- (c) whenever required by the competent authority.

Except in the cases provided for in appendix 2, sections 5 and 6, to this annex, the checks shall be made at a testing station designated or approved by the competent authority of the country in which the equipment is registered or recorded, unless, in the case of the check referred to in (a) above, a check has already been made on the equipment itself or on its prototype in a testing station designated or approved by the competent authority of the country in which the equipment was manufactured.

2. The methods and procedures to be used in checking for compliance with the standards are described in appendix 2 to this annex.

3. A certificate of compliance with the standards shall be issued by the competent authority of the country in which the equipment is to be registered or recorded. This certificate shall conform to the model reproduced in appendix 3 to this annex.

The certificate of compliance shall be carried on the equipment during carriage and be produced whenever so required by the control authorities. However, if a certification plate of compliance, as reproduced in appendix 3 to this annex, is fixed to the equipment, the certification plate of compliance shall be recognized as equivalent to a certificate of compliance. A certification plate of compliance may be fixed to the equipment only when a valid certificate of compliance is available. Certification plates of compliance shall be removed as soon as the equipment ceases to conform to the standards laid down in this annex.

In the case of equipment transferred to another country, which is a Contracting Party to ATP, it shall be accompanied by the following documents so that the competent authority of the country in which the equipment is to be registered or recorded can issue a certificate of compliance:

- (a) in all cases, the test report of the equipment itself or, in the case of serially produced equipment, of the reference equipment;
- (b) in all cases, the certificate of compliance issued by the competent authority of the country of manufacture or, for equipment in service, the competent authority of the country of registration. This certificate will be treated as a provisional certificate if necessary with a maximum validity of six months. For Multi Temperature, Multi Compartment equipment also the declaration of conformity (see 7.3.6 of annex I, appendix 2) shall be provided;
- (c) in the case of serially produced equipment, the technical specification of the equipment to be certified as issued by the manufacturer of the equipment or his duly accredited representative (this specification shall cover the same items as the descriptive pages concerning the equipment which appear in the test report and shall be drawn up in at least one of the official languages). For Multi Temperature, Multi Compartment equipment also a calculation sheet (see 7.3.6 of annex I, appendix 2) based on the iterative method shall be provided.

In the case of equipment transferred after it has been in use, the equipment may be subject to a visual inspection to confirm its identity before the competent authority of the country, in which it is to be registered or recorded, issues a certificate of compliance.

For a batch of identical serially produced insulated equipment (containers) having an internal volume of less than 2 m³, a certificate of compliance for the batch may be issued by the competent authority. In such cases the identification numbers of all the insulated equipment, or the first and the last identification numbers of the series, shall be indicated on the certificate of compliance instead of the serial number of each individual unit. In that case, the insulated equipment listed in that certificate shall be fitted with a certification plate of compliance as described in Annex 1, Appendix 3 B issued by the competent authority.

In the case of transfer of this insulated equipment (containers) to another country which is a Contracting Party to this Agreement in order to be registered or recorded there, the competent authority of the country of the new registration or recording may provide an individual certificate of compliance based on the original certificate of compliance established for the whole batch.

4. Distinguishing marks and particulars shall be affixed to the equipment in conformity with the provisions of appendix 4 to this annex. They shall be removed as soon as the equipment ceases to conform to the standards laid down in this annex.
5. The insulated bodies of 'insulated', 'refrigerated', 'mechanically refrigerated', 'heated' or 'mechanically refrigerated and heated' transport equipment and their thermal appliances shall each bear a durable manufacturer's plate firmly affixed by the manufacturer in a conspicuous and readily accessible position on a part not subject to replacement in use. It shall be able to be checked easily and without the use of tools. For insulated bodies, the manufacturer's plate shall be on the outside of the body. The manufacturer's plate shall show clearly and indelibly at least the following particulars:³

Country of manufacture or letters used in international road traffic;

Name of manufacturer or company;

Model (figures and/or letters);

Serial number;

Month and year of manufacture.

6. (a) New equipment of a specific type serially produced may be approved by testing one unit of that type. If the unit tested meets the class specification, the resulting test report shall be regarded as a Type Approval Certificate. This certificate shall expire at the end of a period of six years beginning from the date of completion of the test.

The date of expiry of test reports shall be stated in months and years.

- (b) The competent authority shall take steps to verify that production of other units is in conformity with the approved type. For this purpose it may check by testing sample units drawn at random from the production series.

- (c) A unit shall not be regarded as being of the same type as the unit tested unless it satisfies the following minimum conditions:

- (i) If it is insulated equipment, in which case the reference equipment may be insulated, refrigerated, mechanically refrigerated, heated or mechanically refrigerated and heated equipment,

the construction shall be comparable and, in particular, the insulating material and the method of insulation shall be identical;

the thickness of the insulating material shall be not less than that of the reference equipment;

the interior fittings shall be identical or simplified;

³ These requirements shall apply to new plates only. A transitional period of three months shall be granted from the date of entry into force of this requirement.

the number of doors and the number of hatches or other openings shall be the same or less; and

the inside surface area of the body shall not be as much as 20% greater or smaller;

minor and limited modifications of added or exchanged interior and exterior fittings may be permitted:⁴

- if the equivalent volume of accumulated insulation material of all such modifications is less than 1/100th of the total volume of the insulating material in the insulated unit;
- if the K coefficient of the tested reference equipment, corrected by a calculation of the added thermal losses, is less than or equal to the K coefficient limit of the category of the equipment; and
- if such modifications of interior fittings are carried out using the same technique, particularly as concerns glued fittings.

All modifications shall be done by or be approved by the manufacturer of the insulated equipment.

(ii) If it is refrigerated equipment, in which case the reference equipment shall be refrigerated equipment,

the conditions set out under (i) above shall be satisfied;

inside circulating fans shall be comparable;

the source of cold shall be identical; and

the reserve of cold per unit of inside surface area shall be greater or equal;

(iii) If it is mechanically refrigerated equipment, in which case the reference equipment shall be either:

(a) mechanically refrigerated equipment;

- the conditions set out in (i) above shall be satisfied; and
- the effective refrigerating capacity of the mechanical refrigeration appliance per unit of inside surface area, under the same temperature conditions, shall be greater or equal; or

(b) insulated equipment which is complete in every detail but minus its mechanical refrigeration unit which will be fitted at a later date.

The resulting aperture will be filled, during the measurement of the K coefficient, with close fitting panels of the same overall thickness and type of insulation as is fitted to the front wall. In which case:

- the conditions set out in (i) above shall be satisfied; and
- the effective refrigerating capacity of the mechanical refrigeration unit fitted to insulated reference equipment shall be as defined in annex 1, appendix 2, paragraph 3.2.6.

⁴ The present provisions regarding minor and limited modifications apply to equipment manufactured after the date of their entry into force (30 September 2015).

- (iv) If it is heated equipment, in which case the reference equipment may be insulated or heated equipment,
 - the conditions set out under (i) above shall be satisfied;
 - the source of heat shall be identical; and
 - the capacity of the heating appliance per unit of inside surface area shall be greater or equal.
- (v) If it is mechanically refrigerated and heated equipment, in which case the reference equipment shall be:

- (a) mechanically refrigerated and heated equipment,

- the conditions set out under (i) above shall be satisfied;

and

- the effective refrigerating capacity of the mechanical refrigeration or mechanical refrigeration-heating appliance per unit of inside surface area, under the same temperature conditions, shall be greater or equal;
 - the source of heat shall be identical; and
 - the capacity of the heating appliance per unit of inside surface area shall be greater or equal;

or

- (b) insulated equipment which is complete in every detail but minus its mechanical refrigeration, heating or mechanical refrigeration-heating appliance, which will be fitted at a later date.

The resulting aperture will be filled, during the measurement of the K coefficient, with close fitting panels of the same overall thickness and type of insulation as are fitted to the front wall, in which case:

- the conditions set out under (i) above shall be satisfied;

and

- the effective refrigerating capacity of the mechanical refrigeration or mechanical refrigeration-heating unit fitted to insulated reference equipment shall be as defined in annex 1, appendix 2, paragraph 3.4.7;
 - the source of heat shall be identical; and
 - the capacity of the heating appliance per unit of inside surface area shall be greater or equal.

- (d) If, in the course of the six-year period, the production series exceeds 100 units, the competent authority shall determine the percentage of units to be tested.

Annex 1, Appendix 2

METHODS AND PROCEDURES FOR MEASURING AND CHECKING THE INSULATING CAPACITY AND THE EFFICIENCY OF THE COOLING OR HEATING APPLIANCES OF SPECIAL EQUIPMENT FOR THE CARRIAGE OF PERISHABLE FOODSTUFFS

1. DEFINITIONS AND GENERAL PRINCIPLES

- 1.1 K coefficient. The overall heat transfer coefficient (K coefficient) of the special equipment is defined by the following formula:

$$K = \frac{W}{S \times \Delta T}$$

where W is either the heating power or the cooling capacity, as the case may be, required to maintain a constant absolute temperature difference ΔT between the mean inside temperature T_i and the mean outside temperature T_e , during continuous operation, when the mean outside temperature T_e is constant for a body of mean surface area S.

- 1.2 The mean surface area S of the body is the geometric mean of the inside surface area S_i and the outside surface area S_e of the body.

$$S = \sqrt{S_i \times S_e}$$

In determining the two surface areas S_i and S_e , structural peculiarities and surface irregularities of the body, such as chamfers, wheel-arches and similar features, shall be taken into account and shall be noted under the appropriate heading in test reports; however, if the body is covered with corrugated sheet metal the area considered shall be that of the plane surface occupied, not that of the developed corrugated surface.

For calculating the mean surface area of the body of a panel van, the test station appointed by the competent authority shall select from one of the following three methods A-C. For calculating the mean surface area of the body of a tank, the test station appointed by the competent authority may use method A or D.

Method A. The manufacturer shall provide drawings and calculations of the inside and outside surfaces.

The surface areas S_e and S_i are determined taking into consideration the projected surface areas of specific design features of the irregularities of its surface such as curves, corrugations, wheel boxes, etc.

Method B. The manufacturer shall provide drawings and the test station appointed by the competent authority shall use the calculations according to the schemes⁵ and formulae below.

$$S_i = (((WI \times LI) + (HI \times LI) + (HI \times WI)) \times 2)$$

$$S_e = (((WE \times LE) + (HE \times LE) + (HE \times WE)) \times 2)$$

Where:

WI is the Y axis of the internal surface area

⁵ The relevant figures can be found in the ATP Handbook at the following link: <https://unece.org/atp-handbook>

LI is the X axis of the internal surface area

HI is the Z axis of the internal surface area

WE is the Y axis of the external surface area

LE is the X axis of the external surface area

HE is the Z axis of the external surface area

Using the most appropriate formula for the Y axis of the internal surface area

$$WI = (WLa \times a + WLi \times (b + c/2) + WLe \times c/2) / (a + b + c)$$

$$WI = (WLa \times a/2 + WLi (a/2 + b/2) + WLe (b/2)) / (a + b)$$

$$WI = (WLa \times a + WLi \times b + (WLi + WLe)/2 \times c) / (a + b + c)$$

Where:

WLa is the internal width at the floor or between the wheel arches

WLi is the internal width at the height of the vertical edge from the floor or above the wheel arches.

WLe is the internal width along the roof

a is the height of the vertical edge from the floor

b is either the height between the bottom of the vertical edge and the roof or between the top of the wheel arch and the top of the vertical edge from the floor.

c is the height between the roof and point b

Along with the two formulae for the X and Z axes of the internal surface:

$$LI = ((LLa \times a) + (LLe + LLe) / 2 \times b + (LLe \times c)) / (a + b + c)$$

Where:

LLa is the internal length along the floor

LLe is the internal length above the wheel arches

LLe is the internal length along the roof

a is the height between LLa and LLe

b is the height between LLe and LLe

c is the height between LLe and the roof

$$WI = (WI \text{ back} + WI \text{ front}) / 2$$

Where:

WI back is the width at the bulkhead

WI front is the width at the door end

The external surface area is calculated using the formulae below

$$WE = WI + \text{declared mean thickness} \times 2$$

$$LE = LI + \text{declared mean thickness} \times 2$$

$$HE = HI + \text{declared mean thickness} \times 2$$

Method C. If methods A or B are not acceptable to the experts, the internal surface of the panel van shall be measured according to the figures and formulae in method B.

The initial K value shall then be calculated based on the internal surface area, taking the insulation thickness as nil to start the iteration process. From this K value, the average insulation thickness is calculated from the assumption that λ for the insulation has a value of 0.025 W/m·°C.

$$d = S_i \times \Delta T \times \frac{\lambda}{W}$$

Once the thickness of the insulation has been estimated, the external surface area is calculated and the mean surface area is determined. The final K value is derived from successive iterations.

A different value of λ may be used in this method if the actual value of λ can be estimated by physical measurements of the properties of the main thermal insulator of the wall, or by statistical data of other ATP units of similar features. The value of λ and the statistical data used, if applicable, shall be indicated in or annexed to the test report Model No. 1 A.

Method D. If method A is not acceptable to the experts, the external surface of the tank shall be measured, taking into account the geometrical shape of the tank and the main values needed to model this shape (e.g. diameter, radius, length of cylinder, etc.). This method can only be used if the tank can be assimilated to regular geometrical forms (cylinder, cone, sphere) that can be described by mathematical equations.

The initial K value shall then be calculated based on the external surface area, taking the insulation thickness as nil to start the iteration process. From this K value, the average insulation thickness is calculated from the assumption that λ for the insulation has a value of 0.035 W/m·°C

$$d = S_e \times \Delta T \times \frac{\lambda}{W}$$

Once the thickness of the insulation has been estimated, the internal surface area is calculated taking into consideration the geometrical shape of the tank, and the mean surface area is determined. The final K value is derived from successive iterations.

A different value of λ may be used in this method if the actual value of λ can be estimated by physical measurements of the properties of the main thermal insulator of the wall, or by statistical data of other ATP units of similar features. The value of λ and the statistical data used, if applicable, shall be indicated in or annexed to the test report Model No. 1 B.

Temperature measuring points

1.3 In the case of parallelepipedic bodies, the mean inside temperature of the body (T_i) is the arithmetic mean of the temperatures measured 10 cm from the walls at the following 12 points:

- (a) The eight inside corners of the body; and
- (b) The centres of the four inside faces having the largest area.

If the body is not parallelepipedic, the 12 points of measurements shall be distributed as satisfactorily as possible having regard to the shape of the body.

- 1.4 In the case of parallelepipedic bodies, the mean outside temperature of the body (T_e) is the arithmetic mean of the temperatures measured 10 cm from the walls at the following 12 points:

- (a) The eight outside corners of the body; and
- (b) The centres of the four outside faces having the largest area.

If the body is not parallelepipedic, the 12 points of measurement shall be distributed as satisfactorily as possible having regard to the shape of the body.

- 1.5 The mean temperature of the walls of the body is the arithmetic mean of the mean outside temperature of the body and the mean inside temperature of the body:

$$\frac{T_e + T_i}{2}$$

- 1.6 Temperature measuring instruments protected against radiation shall be placed inside and outside the body at the points specified in paragraphs 1.3 and 1.4 of this appendix.

Steady state period and duration of test

- 1.7 The mean outside temperatures and the mean inside temperatures of the body, taken over a steady period of not less than 12 hours, shall not vary by more than ± 0.3 °C, and these temperatures shall not vary by more than ± 1.0 °C during the preceding 6 hours.

The difference between the heating power or cooling capacity measured over two periods of not less than 3 hours at the start and at the end of the steady state period, and separated by at least 6 hours, shall be less than 3%.

The mean values of the temperatures and heating or cooling capacity over at least the last 6 hours of the steady state period will be used in K coefficient calculation.

The mean inside and outside temperatures at the beginning and the end of the calculation period of at least 6 hours shall not differ by more than 0.2 °C.

2. INSULATING CAPACITY OF EQUIPMENT

Procedures for measuring the K coefficient

2.1 Equipment other than liquidfoodstuffs tanks

- 2.1.1 The K coefficient shall be measured in continuous operation either by the internal cooling method or by the internal heating method. In either case, the empty body shall be placed in an insulated chamber.

Test method

- 2.1.2 Where the internal cooling method is used, one or more heat exchangers shall be placed inside the body. The surface area of these exchangers shall be such that, if a fluid at a temperature not lower than 0 °C ⁶ passes through them, the mean inside temperature of the body remains below + 10 °C when continuous operation has been established. Where the internal heating method is used, electrical heating appliances (resistors, etc.) shall be used. The heat exchangers or electrical heating appliances shall be fitted with fans having a delivery rate sufficient to obtain 40 to 70 air charges per hour related to the empty volume of the tested body, and the air distribution around all inside surfaces of the tested body shall be sufficient to ensure that the maximum difference between the temperatures of any 2 of the 12 points specified in paragraph 1.3 of this appendix does not exceed 2 °C when continuous operation has been established.

- 2.1.3 Heat quantity: The heat dissipated by the electrical resistance fan heaters shall not exceed a flow of 1 W/cm² and the heater units shall be protected by a casing of low emissivity.

⁶ To prevent frosting.

The electrical energy consumption shall be determined with an accuracy of $\pm 0.5\%$.

Test procedure

- 2.1.4 Whatever the method employed, the mean temperature of the insulated chamber shall throughout the test be kept uniform, and constant in compliance with paragraph 1.7 of this appendix, at a level such that the temperature difference between the inside of the body and the insulated chamber is $25\text{ °C} \pm 2\text{ °C}$, the average temperature of the walls of the body being maintained at $+ 20\text{ °C} \pm 0.5\text{ °C}$.
- 2.1.5 During the test, whether by the internal cooling method or by the internal heating method, the mass of air in the chamber shall be made to circulate continuously so that the speed of movement of the air 10 cm from the walls is maintained at between 1 and 2 metres/second.
- 2.1.6 The appliances for generating and distributing cold or heat and for measuring the quantity of cold or heat exchanged and the heat equivalent of the air-circulating fans shall be started up. Electrical cable losses between the heat input measuring instrument and the tested body shall be established by a measurement or calculation and subtracted from the total heat input measured.
- 2.1.7 When continuous operation has been established, the maximum difference between the temperatures at the warmest and at the coldest points on the outside of the body shall not exceed 2 °C .
- 2.1.8 The mean outside temperature and the mean inside temperature of the body shall each be read at least every 5 minutes.

2.2 Liquid-foodstuffs tanks

- 2.2.1 The method described below applies only to single-compartment or multiple-compartment tank equipment intended solely for the carriage of liquid foodstuffs such as milk. Each compartment of such tanks shall have at least one manhole and one discharge-pipe connecting socket; where there are several compartments they shall be separated from one another by non-insulated vertical partitions.
- 2.2.2 K coefficients shall be measured in continuous operation by internal heating of the empty tank in an insulated chamber.

Test method

- 2.2.3 An electrical heating appliance (resistors, etc.) shall be placed inside the tank. If the tank has several compartments, an electrical heating appliance shall be placed in each compartment. The electrical heating appliances shall be fitted with fans with a delivery rate sufficient to ensure that the difference between the maximum temperature and the minimum temperature inside each compartment does not exceed 3 °C when continuous operation has been established. If the tank comprises several compartments, the difference between the mean temperature in the coldest compartment and the mean temperature in the warmest compartment shall not exceed 2 °C , the temperatures being measured as specified in paragraph 2.2.4 of this appendix.
- 2.2.4 Temperature measuring instruments protected against radiation shall be placed inside and outside the tank 10 cm from the walls, as follows:
 - (a) If the tank has only one compartment, measurements shall be made at a minimum of 12 points positioned as follows:
 - The four extremities of two diameters at right angles to one another, one horizontal and the other vertical, near each of the two ends of the tank;
 - The four extremities of two diameters at right angles to one another, inclined at an angle of 45° to the horizontal, in the axial plane of the tank;
 - (b) If the tank has two compartments, the measurements shall be made at least at the following points:
 - Near the end of the first compartment and near the partition with the second compartment, at the extremities of three radiuses forming 120° angles, one of the radiuses being directed vertically upwards.

Near the end of the second compartment and near the partition with the first compartment, at the extremities of three radiuses forming 120° angles, one of the radiuses being directed vertically downwards.

- (c) If the tank has several compartments, the points of measurement shall be as follows:

for each of the two end compartments, at least the following:

The extremities of a horizontal diameter near the end and the extremities of a vertical diameter near the partition;

and for each of the other compartments, at least the following:

The extremities of a diameter inclined at an angle of 45° to the horizontal near one of the partitions and the extremities of a diameter perpendicular to the first and near the other partition.

- (d) The mean inside temperature and the mean outside temperature of the tank shall respectively be the arithmetic mean of all the measurements taken inside and all the measurements taken outside the tank. In the case of tanks having at least two compartments, the mean inside temperature of each compartment shall be the arithmetic mean of the measurements made in the compartment, and the number of those measurements in each compartment shall be no less than four and the total number of measurements in all compartments of the tank shall be no less than twelve.

Test procedure

- 2.2.5 Throughout the test, the mean temperature of the insulated chamber shall be kept uniform, and constant in compliance with paragraph 1.7 of this appendix, at a level such that the difference in temperature between the inside of the tank and that of the insulated chamber is not less than $25\text{ °C} \pm 2\text{ °C}$, with the average temperature of the tank walls being maintained at $+20\text{ °C} \pm 0.5\text{ °C}$.
- 2.2.6 The mass of air in the chamber shall be made to circulate continuously so that the speed of movement of the air 10 cm from the walls is maintained at between 1 and 2 metres/second.
- 2.2.7 The appliances for heating and circulating the air and for measuring the quantity of heat exchanged and the heat equivalent of the air-circulating fans shall be started up.
- 2.2.8 When continuous operation has been established, the maximum difference between the temperatures at the warmest and at the coldest points on the outside of the tank shall not exceed 2 °C.
- 2.2.9 The mean outside temperature and the mean inside temperature of the body shall each be read at least every 5 minutes.

2.3 Provisions common to all types of insulated equipment

2.3.1 Verification of the K coefficient

Where the purpose of the tests is not to determine the K coefficient but simply to verify that it is below a certain limit, the tests carried out as described in paragraphs 2.1.1 to 2.2.9 of this appendix may be stopped as soon as the measurements made show that the K coefficient meets the requirements.

2.3.2 Accuracy of measurements of the K coefficient

Testing stations shall be provided with the equipment and instruments necessary to ensure that the K coefficient is determined with an expanded uncertainty of $\pm 10\%$ when using the method of internal cooling and $\pm 5\%$ when using the method of internal heating. In calculating the expanded uncertainty of measurement of the K coefficient, the confidence level should be at least 95%.

3. EFFECTIVENESS OF THERMAL APPLIANCES OF EQUIPMENT

Procedures for determining the efficiency of thermal appliances of equipment

3.1 Refrigerated equipment

- 3.1.1 The empty equipment shall be placed in an insulated chamber whose mean temperature shall be kept uniform, and constant to within $\pm 0.5\text{ }^{\circ}\text{C}$, at $+ 30\text{ }^{\circ}\text{C}$. The mass of air in the chamber shall be made to circulate as described in paragraph 2.1.5 of this appendix.
- 3.1.2 Temperature measuring instruments protected against radiation shall be placed inside and outside the body at the points specified in paragraphs 1.3 and 1.4 of this appendix.

Test procedure

- 3.1.3 (a) In the case of **equipment other than equipment with fixed eutectic plates, and equipment fitted with liquefied gas systems**, the maximum weight of refrigerant specified by the manufacturer or which can normally be accommodated shall be loaded into the spaces provided when the mean inside temperature of the body has reached the mean outside temperature of the body ($+ 30\text{ }^{\circ}\text{C}$). Doors, hatches and other openings shall be closed and the inside ventilation appliances (if any) of the equipment shall be started up at maximum capacity. In addition, in the case of new equipment, a heating appliance with a heating capacity equal to 35% of the heat exchanged through the walls in continuous operation shall be started up inside the body when the temperature prescribed for the class to which the equipment is presumed to belong has been reached. No additional refrigerant shall be loaded during the test;
- (b) In the case of **equipment with fixed eutectic plates**, the test shall comprise a preliminary phase of freezing of the eutectic solution. For this purpose, when the mean inside temperature of the body and the temperature of the plates have reached the mean outside temperature ($+ 30\text{ }^{\circ}\text{C}$), the plate-cooling appliance shall be put into operation for 18 consecutive hours after closure of the doors and hatches. If the plate-cooling appliance includes a cyclically-operating mechanism, the total duration of operation of the appliance shall be 24 hours. In the case of new equipment, as soon as the cooling appliance is stopped, a heating appliance with a heating capacity equal to 35% of the heat exchanged through the walls in continuous operation shall be started up inside the body when the temperature prescribed for the class to which the equipment is presumed to belong has been reached. The solution shall not be subjected to any re-freezing operation during the test;
- (c) In the case of **equipment fitted with liquefied gas systems**, the following test procedure shall be used: when the mean inside temperature of the body has reached the mean outside temperature ($+ 30\text{ }^{\circ}\text{C}$), the receptacles for the liquefied gas shall be filled to the level prescribed by the manufacturer. Then the doors, hatches and other openings shall be closed as in normal operation and the inside ventilation appliances (if any) of the equipment shall be started up at maximum capacity. The thermostat shall be set at a temperature not more than 2 degrees below the limit temperature of the presumed class of the equipment. Cooling of the body then shall be commenced. During the cooling of the body the refrigerant consumed is simultaneously replaced. This replacement shall be effected:
- either for a time corresponding to the interval between the commencement of cooling and the moment when the temperature prescribed for the class to which the equipment is presumed to belong is reached for the first time; or
 - for a duration of three hours counting from the commencement of cooling, whichever is shorter.

Beyond this period, no additional refrigerant shall be loaded during the test.

In the case of new equipment, a heating appliance with a heating capacity equal to 35% of the heat exchanged through the walls in continuous operation shall be started up inside the body when the class temperature has been reached.

Provisions common to all types of refrigerated equipment

- 3.1.4 The mean outside temperature and the mean inside temperature of the body shall each be read at least every 5 minutes.
- 3.1.5 The test shall be continued for 12 hours after the mean inside temperature of the body has reached the lower limit prescribed for the class to which the equipment is presumed to belong (A = +7 °C; B = -10 °C; C = -20 °C; D = 0 °C) or, in the case of equipment with fixed eutectic plates, after stoppage of the cooling appliance.

Criterion of satisfaction

- 3.1.6 The test shall be deemed satisfactory if the mean inside temperature of the body does not exceed the aforesaid lower limit during the aforesaid period of 12 hours.
- 3.1.7 If a refrigerating appliance of paragraph 3.1.3 (c) with all its accessories has undergone separately, to the satisfaction of the competent authority, the test in section 9 of this appendix to determine its effective refrigerating capacity at the prescribed reference temperatures, the transport equipment may be accepted as refrigerated equipment without undergoing an efficiency test if the effective refrigerating capacity of the appliance in continuous operation exceeds the heat loss through the walls for the class under consideration, multiplied by the factor 1,75.
- 3.1.8 If the refrigerating appliance is replaced by a unit of a different type, the competent authority may:
- (a) Require the equipment to undergo the determinations and verifications prescribed in paragraphs 3.1.3 to 3.1.5; or
 - (b) Satisfy itself that the effective refrigerating capacity of the new refrigerating appliance is, at the temperature prescribed for equipment of the class concerned, at least equal to that of the unit replaced; or
 - (c) Satisfy itself that the effective refrigerating capacity of the new refrigerating appliance meets the requirements of paragraph 3.1.7.
- 3.1.9 A refrigerating unit working with liquefied gas is regarded as being of the same type as the unit tested if:
- (a) The same refrigerant is used;
 - (b) The evaporator has the same capacity;
 - (c) The regulation system has the same characteristics;
 - (d) The liquefied gas tank has the same design and its capacity is equal or upper to the capacity stated in the test report.

The diameters and the technology of the supply lines are identical.

3.2 Mechanically refrigerated equipment

Test method

- 3.2.1 The test shall be carried out in the conditions described in paragraphs 3.1.1 and 3.1.2 of this appendix.

Test procedure

- 3.2.2 When the mean inside temperature of the body reaches the outside temperature (+ 30 °C), the doors, hatches and other openings shall be closed and the refrigerating appliance and the inside ventilating appliances (if any) shall be started up at maximum capacity. In addition, in the case of new equipment, a heating appliance with a heating capacity equal to 35% of the heat exchanged through the walls in continuous operation shall be started up inside the body when the temperature prescribed for the class to which the equipment is presumed to belong has been reached.

- 3.2.3 The mean outside temperature and the mean inside temperature of the body shall each be read at least every 5 minutes.
- 3.2.4 The test shall be continued for 12 hours after the mean inside temperature of the body has reached:
- either the lower limit prescribed for the class to which the equipment is presumed to belong in the case of classes A, B and C (A = 0 °C; B = -10 °C; C = -20 °C); or
 - a level not lower than the upper limit prescribed for the class to which the equipment is presumed to belong in the case of classes D, E, and F (D = 0 °C; E = -10 °C; F = -20 °C).

Criterion of satisfaction

- 3.2.5 The test shall be deemed satisfactory if the refrigerating appliance is able to maintain the prescribed temperature conditions during the said 12-hour periods, with any automatic defrosting of the refrigerating unit not being taken into account.
- 3.2.6 If the refrigerating appliance with all its accessories has undergone separately, to the satisfaction of the competent authority, a test to determine its effective refrigerating capacity at the prescribed reference temperatures, the transport equipment may be accepted as mechanically refrigerated equipment without undergoing an efficiency test if the effective refrigerating capacity of the appliance in continuous operation exceeds the heat loss through the walls for the class under consideration, multiplied by the factor 1.75.
- 3.2.7 If the mechanically refrigerating unit is replaced by a unit of a different type, the competent authority may:
- (a) require the equipment to undergo the determinations and verifications prescribed in paragraphs 3.2.1 to 3.2.4; or
 - (b) satisfy itself that the effective refrigerating capacity of the new mechanically refrigerating unit is, at the temperature prescribed for equipment of the class concerned, at least equal to that of the unit replaced; or
 - (c) satisfy itself that the effective refrigerating capacity of the new mechanically refrigerating unit meets the requirements of paragraph 3.2.6.
- 3.2.8 If the refrigerating appliance with all of its accessories has undergone separately, to the satisfaction of the competent authority, a test to determine the air circulation volume, the minimum required airflow in cooling mode for both mechanically refrigerated equipment and mechanically refrigerated and heated equipment with a forced ventilation system shall conform to the following formula⁷:

$$\dot{V}_L = N \times V$$

Where minimum airflow rate $\dot{V}_{Lmin}$ is air changes per hour N, multiplied by the empty volume V.

$$\text{Where } N = 50$$

The air volume flow may be modulated in part load operation after reaching the set point temperature and if the temperature of the class is reached, the air flow needs not be continuous.

Where V exceeds 60 m³ $\dot{V}_L$ may be limited to at least 3000 m³ per hour for containers, wagons and lorries⁸.

Where V exceeds 100 m³ $\dot{V}_L$ may be limited to at least 5000 m³ per hour.

⁷ Applies to equipment manufactured after 22 June 2024.

⁸ Containers can be demountable bodies of lorries.

3.3 Heated equipment

Test method

- 3.3.1 The empty equipment shall be placed in an insulated chamber whose temperature shall be kept uniform and constant at as low a level as possible. The atmosphere of the chamber shall be made to circulate as described in paragraph 2.1.5 of this appendix.
- 3.3.2 Temperature measuring instruments protected against radiation shall be placed inside and outside the body at the points specified in paragraphs 1.3 and 1.4 of this appendix.

Test procedure

- 3.3.3 Doors, hatches and other openings shall be closed and the heating equipment and the inside ventilating appliances (if any) shall be started up at maximum capacity.
- 3.3.4 The mean outside temperature and the mean inside temperature of the body shall each be read at least every 5 minutes.
- 3.3.5 The test shall be continued for 12 hours after the difference between the mean inside temperature and the mean outside temperature of the body has reached the level corresponding to the conditions prescribed for the class to which the equipment is presumed to belong. In the case of new equipment, the above temperature difference shall be increased by 35 per cent.

Criterion of satisfaction

- 3.3.6 The test shall be deemed satisfactory if the heating appliance is able to maintain the prescribed temperature difference during the 12 hours aforesaid.

3.4 Mechanically refrigerated and heated equipment

Test method

- 3.4.1 The test shall be carried out in two stages. The efficiency of the refrigeration unit of the refrigerating or refrigerating-heating appliance is determined in the first stage and that of the heating appliance is determined in the second stage.
- 3.4.2 In the first stage, the test shall be carried out in the conditions described in paragraphs 3.1.1 and 3.1.2 of this appendix; in the second stage, it shall be carried out in the conditions described in paragraphs 3.3.1 and 3.3.2 of this appendix.

Test procedure

- 3.4.3 (a) The general procedure for measuring the effective refrigerating capacity of mechanically refrigerated appliances stipulated in paragraph 4.1 and 4.2 shall be applied after adapting it such that it can be used to measure heating appliances using a calorimeter box.

The temperature at the air inlet of the thermal appliance or at the air inlet of the evaporator inside the calorimeter box shall be +12 °C.

For the measurement of the effective heating capacities of classes A, E and I, one test at a mean outside temperature (T_e) of –10 °C shall be carried out.

For the measurement of the effective heating capacities of classes B, F and J, tests at two mean outside temperatures (T_e) shall be carried out: one at –10 °C and the other at –20 °C.

For the measurement of the effective heating capacities of classes C, D, G, H, K, or L, three tests shall be carried out. One test at a mean outside temperature (T_e) of –10 °C, another test at the minimum outside temperature required by the class and one test at an intermediate outside temperature to allow an interpolation for the effective heating capacities for other in-between class temperatures.

For purely electric heating systems a minimum of one test shall be carried out to measure the effective heating capacities of classes A, B, C, D, E, F, G, H, I, J, K or L. This test should be carried out

at +12 °C at the air inlet of the evaporator and the minimum outside temperature required by the class.

- (i) If the measurement of the effective heating capacity is carried out at the lowest outside temperature required by the class, no further test shall be required.
 - (ii) If the measurement of the effective heating capacity is not carried out at the lowest temperature required by the class, an additional functional test of the heating appliance shall be carried out. This functional test shall be done at the minimum temperature required by the class (e.g. –40 °C for class L) to verify that the heating appliance and its drive system (e.g. diesel engine driven generator) starts and works properly at the lowest temperature.
 - (b) When the measurement is carried out on equipment, the basic requirements for the test procedure for the first stage are described in paragraphs 3.2.2 and 3.2.3 of this appendix; those for the second stage are described in paragraphs 3.3.3 and 3.3.4 of this appendix.
- 3.4.4 The second stage of the test may be initiated immediately after the end of the first stage, without the measuring equipment being dismantled.
- 3.4.5 In each stage, the test shall be continued for 12 hours after:
- (a) in the first stage, the mean inside temperature of the body has reached the lower limit prescribed for the class to which the equipment is presumed to belong;
 - (b) in the second stage, the difference between the mean inside temperature of the body and the mean outside temperature of the body has reached the level corresponding to the conditions prescribed for the class to which the equipment is presumed to belong. In the case of new equipment, the above temperature difference shall be increased by 35 per cent.

Criterion of satisfaction

- 3.4.6 The results of the test shall be deemed satisfactory if:
- (a) in the first stage, the refrigerating or refrigerating-heating appliance is able to maintain the prescribed temperature conditions during the said 12-hour period, with any automatic defrosting of the refrigerating or refrigerating-heating unit not being taken into account;
 - (b) in the second stage, the heating appliance is able to maintain the prescribed temperature difference during the said 12-hour period.
- 3.4.7 If the refrigerating unit of the refrigerating or refrigerating-heating appliance with all its accessories has undergone separately, to the satisfaction of the competent authority, a test to determine its effective refrigerating capacity at the prescribed reference temperatures, the transport equipment may be accepted as having passed the first stage of the test without undergoing an efficiency test if the effective refrigerating capacity of the appliance in continuous operation exceeds the heat loss through the walls for the class under consideration, multiplied by the factor 1.75.
- 3.4.8 If the mechanically refrigerating unit of the refrigerating or refrigerating-heating appliance is replaced by a unit of a different type, the competent authority may:
- (a) require the equipment to undergo the determinations and verifications for the first stage of testing prescribed in paragraphs 3.4.1–3.4.5 of this appendix; or
 - (b) satisfy itself that the effective refrigerating capacity of the new mechanically refrigerating unit is, at the temperature prescribed for equipment of the class concerned, at least equal to that of the unit replaced; or
 - (c) satisfy itself that the effective refrigerating capacity of the new mechanically refrigerating unit meets the requirements of paragraph 3.4.7 of this appendix.
- 3.4.9 The equipment should comply with the airflow requirements in cooling mode prescribed in paragraph 3.2.8.

4. PROCEDURE FOR MEASURING THE EFFECTIVE REFRIGERATING CAPACITY W_o OF A UNIT WHEN THE EVAPORATOR IS FREE FROM FROST

4.1 General principles

- 4.1.1 When attached to either a calorimeter box or the insulated body of a unit of transport equipment, and operating continuously, this capacity is:

$$W_o = W_j + U \times \Delta T$$

where U is the heat leakage of the calorimeter box or insulated body, $W/^\circ C$.

ΔT is the difference between the mean inside temperature T_i and the mean outside temperature T_e of the calorimeter or insulated body ($^\circ C$),

W_j is the heat dissipated by the fan heater unit to maintain each temperature difference in equilibrium.

4.2 Test method

- 4.2.1 The refrigeration unit is either fitted to a calorimeter box or the insulated body of a unit of transport equipment.

In each case, the heat leakage is measured at a single mean wall temperature prior to the capacity test. An arithmetical correction factor, based upon the experience of the testing station, is made to take into account the average temperature of the walls at each thermal equilibrium during the determination of the effective refrigerating capacity.

It is preferable to use a calibrated calorimeter box to obtain maximum accuracy.

Measurements and procedure shall be as described in paragraphs 1.1 to 2.1.8 above; however, it is sufficient to measure U the heat leakage only, the value of this coefficient being defined by the following relationship:

$$U = \frac{W}{\Delta T_m}$$

where:

W is the heating power (in Watts) dissipated by the internal heater and fans;

ΔT_m is the difference between the mean internal temperature T_i and the mean external temperature T_e ;

U is the heat flow per degree of difference between the air temperature inside and outside the calorimeter box or unit of transport equipment measured with the refrigeration unit fitted.

The calorimeter box or unit of transport equipment is placed in a test chamber. If a calorimeter box is used, $U \times \Delta T$ should be not more than 35% of the effective refrigerating capacity W_o .

The calorimeter box or unit of transport equipment shall be at least normally insulated.

4.2.2 Instrumentation

Test stations shall be equipped with instruments to measure the U value to an accuracy of $\pm 5\%$. Heat transfer through air leakage should not exceed 5% of the total heat transfer through the calorimeter box or through the insulated body of the unit of transport equipment. The refrigerating capacity shall be determined with an accuracy of $\pm 5\%$.

The instrumentation of the calorimeter box or unit of transport equipment shall conform to paragraphs 1.3 and 1.4 above. The following are to be measured:

- (a) *Air temperatures:* At least four thermometers uniformly distributed at the inlet to the evaporator;

At least four thermometers uniformly distributed at the outlet to the evaporator;

At least four thermometers uniformly distributed at the air inlet(s) to the refrigeration unit;

The thermometers shall be protected against radiation.

The accuracy of the temperature measuring system shall be ± 0.2 °C;

- (b) *Energy consumption:* Instruments shall be provided to measure the electrical energy or fuel consumption of the refrigeration unit.

The electrical energy and fuel consumption shall be determined with an accuracy of $\pm 0.5\%$;

- (c) *Speed of rotation:* Instruments shall be provided to measure the speed of rotation of the compressors and circulating fans or to allow these speeds to be calculated where direct measurement is impractical.

The speed of rotation shall be measured to an accuracy of $\pm 1\%$;

- (d) *Pressure:* High precision pressure gauges (accurate to $\pm 1\%$) shall be fitted to the condenser and evaporator and to the compressor inlet when the evaporator is fitted with a pressure regulator.

4.2.3 Test conditions

- (a) The average air temperature at the inlet(s) to the refrigeration unit shall be maintained at $30\text{ °C} \pm 0.5\text{ °C}$.

The maximum difference between the temperatures at the warmest and at the coldest points shall not exceed 2 °C .

- (b) Inside the calorimeter box or the insulated body of the unit of transport equipment (at the air inlet to the evaporator): there shall be three levels of temperature between -25 °C and $+12\text{ °C}$ depending on the characteristics of the unit, one temperature level being at the minimum prescribed for the class requested by the manufacturer with a tolerance of $\pm 1\text{ °C}$.

The mean inside temperature shall be maintained within a tolerance of $\pm 0.5\text{ °C}$. During the measurement of refrigerating capacity, the heat dissipated within the calorimeter box or the insulated body of the unit of transport equipment shall be maintained at a constant level with a tolerance of $\pm 1\%$.

When presenting a refrigeration unit for test, the manufacturer shall supply:

- Documents describing the unit to be tested;
- A technical document outlining the parameters that are most important to the functioning of the unit and specifying their allowable range;
- The characteristics of the equipment series tested; and
- A statement as to which prime mover(s) shall be used during testing.

4.3 Test procedure

- 4.3.1 The test shall be divided into two major parts, the cooling phase and the measurement of the effective refrigerating capacity at three increasing temperature levels.

- (a) Cooling phase; the initial temperature of the calorimeter box or transport equipment shall be $30\text{ °C} \pm 3\text{ °C}$. It shall then be lowered to the following temperatures: -25 °C for -20 °C class, -13 °C for -10 °C class or -2 °C for 0 °C class;

- (b) Measurement of effective refrigerating capacity, at each internal temperature level.

A first test to be carried out, for at least four hours at each level of temperature, under control of the thermostat (of the refrigeration unit) to stabilize the heat transfer between the interior and exterior of the calorimeter box or unit of transport equipment.

A second test shall be carried out without the thermostat in operation in order to determine the maximum refrigerating capacity, with the heating power of the internal heater producing an equilibrium condition at each temperature level as prescribed in paragraph 4.2.3.

The duration of the second test shall be not less than four hours.

Before changing from one temperature level to another, the box or unit shall be manually defrosted.

If the refrigeration unit can be operated by more than one form of energy, the tests shall be repeated accordingly.

If the compressor is driven by the vehicle engine, the test shall be carried out at both the minimum speed and at the nominal speed of rotation of the compressor as specified by the manufacturer.

If the compressor is driven by the vehicle motion, the test shall be carried out at the nominal speed of rotation of the compressor as specified by the manufacturer.

If the compressor is driven by an auxiliary electrical power source, the test shall be carried out at the nominal electrical input parameter of the compressor as specified by the manufacturer.

- 4.3.2 The same procedure shall be followed for the enthalpy method described below, but in this case the heat power dissipated by the evaporator fans at each temperature level shall also be measured.

This method may, alternatively, be used to test reference equipment. In this case, the effective refrigerating capacity is measured by multiplying the mass flow (m) of the refrigerant liquid by the difference in enthalpy between the refrigerant vapour leaving the unit (h_o) and the liquid at the inlet to the unit (h_i).

To obtain the effective refrigerating capacity, the heat generated by the evaporator fans (W_f) is deducted. It is difficult to measure W_f if the evaporator fans are driven by an external motor, in this particular case the enthalpy method is not recommended. When the fans are driven by internal electric motors, the electrical power is measured by appropriate instruments with an accuracy of $\pm 3\%$, with refrigerant flow measurement being accurate to $\pm 3\%$.

The heat balance is given by the formula:

$$W_o = (h_o - h_i) m - W_f$$

An electric heater is placed inside the equipment in order to obtain the thermal equilibrium.

4.3.3 Precautions

As the tests for effective refrigerating capacity are carried out with the thermostat of the refrigeration unit disconnected, the following precautions shall be observed:

If the equipment has a hot gas injection system, it shall be inoperative during the test;

with automatic controls of the refrigeration unit which unload individual cylinders (to tune the capacity of the refrigeration unit to motor output) the test shall be carried out with the number of cylinders appropriate for the temperature.

4.3.4 Checks

The following should be verified and the methods used indicated on the test report:

- (a) the defrosting system and the thermostat are functioning correctly;
- (b) the rate of air circulation shall be measured using an existing standard;

If the air circulation of a refrigeration unit's evaporator fans is to be measured, methods capable of measuring the total delivery volume shall be used. Use of one of the relevant existing standards, i.e. ISO 5801: 2017 and AMCA 210-16 is recommended;

- (c) the refrigerant used for tests is that specified by the manufacturer.

4.4 Test result

- 4.4.1 The refrigeration capacity for ATP purposes is that relating to the mean temperature at the inlet(s) of the evaporator. The temperature measuring instruments shall be protected against radiation.

4.5 Procedure for testing mechanically refrigeration units if there is a change of refrigerants

4.5.1 General principles

The test is in line with the procedure described in section 4, paragraphs 4.1 to 4.4 and based on a complete test of the refrigeration unit with one refrigerant, the reference refrigerant.

The refrigeration unit, its refrigeration circuit and the components of the refrigeration circuit shall not be different when using replacement refrigerants. Only very limited modifications are permitted that are:

- (a) Modification and change of expansion device (type, setting);
- (b) Exchange of the lubricant;
- (c) Exchange of gaskets.

Making it a retrofit refrigerant, a replacement refrigerant must have thermo-physical and chemical properties similar to the reference refrigerant and shall result in a similar behavior in the refrigeration circuit especially in terms of refrigerating capacities.

4.5.2 Test procedure

Due to the similar behavior of the retrofit and the reference refrigerants the number of tests necessary for a type approval can be reduced. In terms of refrigerating capacity the retrofit refrigerants must comply with a criterion of equivalence which allows an at maximum 10% lower refrigerating capacity for the retrofit refrigerant when compared with the approved reference refrigerant.

The criterion of equivalence is defined by the formula:

$$\frac{Q_{retrof} - Q_{ref}}{Q_{ref}} \geq -0.10$$

where:

Q_{ref} is the refrigerating capacity of the unit tested with the reference refrigerant,

Q_{retrof} is the refrigerating capacity of the unit tested with the retrofit refrigerant.

The number of tests and the evaluation of the retrofit refrigerants is based on the differences in test results when compared with the reference refrigerant. At least a test at the lowest and at the highest temperature of the respective temperature class in the mode of drive with the highest refrigerating capacities has to be carried out.

In the case of a range of refrigeration units the test program may be further reduced according to paragraph 4.5.3.

Dependent on the results of these tests further measurements may be necessary. Distinctions are made for the following cases:

- (i) **Strict equivalence:** is the case when the difference between the refrigerating capacities of the retrofit refrigerant is lower than or equal to 10% less at all tested temperatures of the respective temperature class when compared to the reference refrigerant. In the case of higher or up to 5% lower refrigerating capacities, the refrigerating capacities of the reference refrigerant can be kept in the test report of the retrofit refrigerant. In the case of more than 5% lower refrigerating capacities, the refrigerating capacities of the retrofit refrigerant may be calculated based on the test results.

- (ii) **Restricted equivalence:** is the case when at least at one tested temperature of the respective temperature class the difference between the refrigerating capacities of the retrofit refrigerant is less than or equal to 10% lower when compared to the reference refrigerant. In this case a further measurement at an intermediate temperature as specified by the manufacturer is necessary in order to confirm the tendency of the deviation and to calculate the refrigerating capacities of the retrofit refrigerant based on the test results.

If the power consumption tested with the retrofit refrigerant deviates from the results obtained with the reference refrigerant, the data of power consumption shall be adjusted according to the measured values by means of calculation, as well in case of strict as in case of restricted equivalence.

4.5.3 Test procedure for a range of refrigeration units

A range of refrigeration units describes a model range of a specific type of refrigeration units of different sizes and different refrigerating capacities but with the same setup of refrigeration circuit and same type of components of the refrigeration circuit.

In case of a range of refrigeration units a further reduction of tests is possible.

If at least two refrigeration units of the range including the units with the smallest and the highest refrigerating capacities tested with the retrofit refrigerant have been proven by the test procedure described in 4.5.2 to be equivalent to the results of the approved reference refrigerant, test reports for all other units of this range of refrigeration units may be established by calculating the refrigerating capacities based on the test reports of the refrigerating units operating with the reference refrigerant and based on this limited number of tests with the retrofit refrigerant.

The conformity of the tested refrigeration units and each other regarded refrigeration unit with the range of refrigeration units has to be confirmed by the manufacturer. In addition, the competent authority shall take adequate measures to verify that each regarded unit is in conformity to this range of refrigeration units.

4.5.4 Test report

An addendum containing both, the test results of the retrofit refrigerant and the approved reference refrigerant, shall be added to the test report of the refrigeration unit operated by a retrofit refrigerant. All modifications of the refrigerating unit according to 4.5.1 have to be documented in this addendum.

In case the refrigerating capacities and maybe also the power consumption of the refrigeration unit containing the retrofit refrigerant have been established by calculation, the procedure of calculation has to be described in this addendum too.

5. CHECKING THE INSULATING CAPACITY OF EQUIPMENT IN SERVICE

For the purpose of checking the insulating capacity of each piece of equipment in service as prescribed in appendix 1, paragraphs 1 (b) and 1 (c), to this annex, the competent authorities may:

Apply the methods described in paragraphs 2.1.1 to 2.3.2 of this appendix; or

Appoint experts to assess the fitness of the equipment for retention in one or other of the categories of insulated equipment. These experts shall take the following particulars into account and shall base their conclusions on information as indicated below.

5.1 General examination of the equipment

This examination shall take the form of an inspection of the equipment to determine the following:

- (a) the durable manufacturer's plate affixed by the manufacturer;
- (b) the general design of the insulating sheathing;

- (c) the method of application of insulation;
- (d) the nature and condition of the walls;
- (e) the condition of the insulated compartment;
- (f) the thickness of the walls;

and to make all appropriate observations concerning the effective insulating capacity of the equipment. For this purpose the experts may cause parts of the equipment to be dismantled and require all documents they may need to consult (plans, test reports, specifications, invoices, etc.) to be placed at their disposal.

5.2 Examination for air-tightness (not applicable to tank equipment)

The inspection shall be made by an observer stationed inside the equipment, which shall be placed in a brightly-illuminated area. Any method yielding more accurate results may be used.

5.3 Decisions

- (a) If the conclusions regarding the general condition of the body are favourable, the equipment may be kept in service as insulated equipment of its initial class for a further period of not more than three years. If the conclusions of the expert or experts are not acceptable, the equipment may be kept in service only following a satisfactory measurement of the K coefficient according to the procedure described in paragraphs 2.1.1 to 2.3.2 of this appendix; it may then be kept in service for a further period of six years.
- (b) In the case of heavily insulated equipment, if the conclusions of an expert or experts show the body to be unsuitable for keeping in service in its initial class but suitable for continuing in service as normally insulated equipment, then the body may be kept in service in an appropriate class for a further three years. In this case, the distinguishing marks (as in appendix 4 of this annex) shall be changed appropriately.
- (c) If the equipment consists of units of serially-produced equipment of a particular type satisfying the requirements of appendix I, paragraph 6, to this annex and belonging to one owner, then in addition to an inspection of each unit of equipment, the K coefficient of not less than 1% of the number of units involved, may be measured in conformity with the provisions of sections 2.1, 2.2 and 2.3 of this appendix. If the results of the examinations and measurements are acceptable, all the equipment in question may be kept in service as insulating equipment of its initial class for a further period of six years.

6. VERIFYING THE EFFECTIVENESS OF THERMAL APPLIANCES OF EQUIPMENT IN SERVICE

To verify as prescribed in appendix 1, paragraphs 1 (b) and (c), to this annex the effectiveness of the thermal appliance of each item of refrigerated, mechanically refrigerated, heated or mechanically refrigerated and heated equipment in service, the competent authorities may:

Apply the methods described in sections 3.1, 3.2, 3.3 and 3.4 of this appendix; or

Appoint experts to apply the particulars described in sections 5.1 and 5.2 of this appendix, when applicable, as well as the following provisions.

6.1 Refrigerated equipment other than equipment with fixed eutectic accumulators

It shall be verified that the inside temperature of the empty equipment, previously brought to the outside temperature, can be brought to the limit temperature of the class to which the equipment belongs, as prescribed in this annex, and maintained below the said limit temperature for a period t

$$\text{such that } t \geq \frac{12\Delta T}{\Delta T'}$$

ΔT is the difference between + 30 °C and the said limit temperature, and

$\Delta T'$ is the difference between the mean outside temperature during the test and the class limit temperature, the outside temperature being not lower than + 15 °C.

If the results are acceptable, the equipment may be kept in service as refrigerated equipment of its initial class for a further period of not more than three years.

6.2 Mechanically refrigerated equipment

6.2.1 Independent equipment

- (i) Equipment constructed from 2 January 2012

It shall be verified that, when the outside temperature is not lower than + 15 °C, the inside temperature of the empty equipment can be brought to the class temperature within a maximum period (in minutes), as prescribed in the table below:

Outside temperature	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	°C
Class C, F	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	min
Class B, E	270	262	253	245	236	228	219	211	202	194	185	177	168	160	151	143	min
Class A, D	180	173	166	159	152	145	138	131	124	117	110	103	96	89	82	75	min

The inside temperature of the empty equipment must have been previously brought to the outside temperature.

If the results are acceptable, the equipment may be kept in service as mechanically refrigerated equipment of its initial class for a further period of not more than three years.

- (ii) Transitional provisions applicable to equipment in service

For equipment constructed prior to the date given in 6.2.1 (i), the following provisions shall apply:

It shall be verified that, when the outside temperature is not lower than +15 °C, the inside temperature of the empty equipment, which has been previously brought to the outside temperature, can be brought within a maximum period of six hours:

In the case of equipment in classes A, B or C, to the minimum temperature, as prescribed in this annex;

In the case of equipment in classes D, E or F, to the limit temperature, as prescribed in this annex.

If the results are acceptable, the equipment may be kept in service as mechanically refrigerated equipment of its initial class for a further period of not more than three years.

(iii) Multi-compartment equipment

The test prescribed in (i) shall be conducted simultaneously for all compartments. During the tests, if the dividing walls are movable, they shall be positioned such that the volumes of the compartments correspond with the maximum refrigeration demand.

Measurements shall be taken until the warmest temperature measured by one of the two sensors located inside each compartment matches the class temperature.

For multi-compartment equipment whose compartment temperatures may be modified, a supplementary reversibility test shall then be conducted:

The temperatures of the compartments shall be selected in such a way that adjacent compartments are, to the extent possible, at different temperatures during the test. Certain compartments shall be brought to the class temperature ($-20\text{ }^{\circ}\text{C}$) while others shall be at $0\text{ }^{\circ}\text{C}$. Once such temperatures are reached, the temperature settings shall be reversed for each compartment, thus bringing the compartments that were at $0\text{ }^{\circ}\text{C}$ to $-20\text{ }^{\circ}\text{C}$ and those that were at $-20\text{ }^{\circ}\text{C}$ to $0\text{ }^{\circ}\text{C}$.

It is verified that compartments at $0\text{ }^{\circ}\text{C}$ have a correct temperature regulation at $0\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ for at least 10 minutes when the other compartments are at $-20\text{ }^{\circ}\text{C}$. Subsequently, the settings for each of the compartments shall be reversed and the same verifications shall be conducted.

In the case of equipment fitted with a heating function, the tests shall begin after the efficiency test when the temperature is $-20\text{ }^{\circ}\text{C}$. Without opening doors, the compartments whose settings had been set at $0\text{ }^{\circ}\text{C}$ shall be warmed, while the other compartments are kept at a temperature of $-20\text{ }^{\circ}\text{C}$. When the control criterion is met, the compartments' settings shall be reversed. There shall be no time limit to carry out these tests.

In the case of equipment without a heating function, it shall be permitted to open the doors of the compartments to expedite the temperature rise of the compartments in question.

The equipment shall be considered compliant if:

- (a) For each compartment, the class temperature has been reached within the time limit shown in the table in (i). To define this time limit, the lowest (coldest) mean outside temperature shall be selected from the two sets of measurements taken with the two outside sensors; and
- (b) The additional tests mentioned in (iii), when required, are satisfactory.

6.2.2 Non-independent equipment

- (i) Non-independent equipment, the refrigeration unit of which is powered by the engine of the vehicle

It shall be verified that, when the outside temperature is not lower than 15°C , the inside temperature of the empty equipment can be maintained at the class temperature, after cool-down and stabilization, when the engine is running at the idle speed set by the manufacturer (where applicable), for a minimum period of one hour and thirty minutes.

If the results are satisfactory, the equipment may be kept in service as mechanically refrigerated equipment in its initial class for a further period of not more than three years.

- (ii) Transitional provisions for non-independent equipment in service:

For equipment constructed prior to 6 January 2018, this provision need not be applied. In this case the equipment shall comply with the requirements of (i) or (ii) of this paragraph as applicable for the date of construction.

- 6.2.3 At the request of the manufacturer, replacement of the original refrigerant fluid of mechanically refrigerated equipment in service is allowed under the following conditions:
- (a) a test report or addendum confirming equivalence to a similar mechanically refrigerated unit with the drop-in refrigerant fluid is available in accordance with annex 1, appendix 2, section 4.5 of the ATP Agreement; and
 - (b) an efficiency test according to 6.2.1 or 6.2.2 has been successfully carried out.

In the event that the request is accepted, the manufacturer's plate must be corrected accordingly.

In the particular case of replacement of the refrigerant fluid such as those mentioned in the table below, subparagraph (a) only requires the manufacturer to request from the official test station the issue of an addendum without any additional testing.

Original refrigerant	Drop-in refrigerant
R404A	R452A

6.3 Heated equipment

It shall be verified that the difference between the inside temperature of the equipment and the outside temperature which governs the class to which the equipment belongs as prescribed in this annex (a difference of 22 °C in the case of class A, 32 °C in the case of class B, 42 °C in the case of class C and 52 °C in the case of class D) can be achieved and be maintained for not less than 12 hours. If the results are acceptable, the equipment may be kept in service as heated equipment of its initial class for a further period of not more than three years.

6.4 Mechanically refrigerated and heated equipment

The check is carried out in two stages.

- (i) During the first stage, it shall be verified that, when the outside temperature is not lower than + 15 °C, the inside temperature of the empty equipment can be brought to the class temperature within a maximum period (in minutes), as prescribed in the table in paragraph 6.2 of this appendix.

The inside temperature of the empty equipment shall have been previously brought to the outside temperature.

- (ii) In the second stage, it shall be verified that the difference between the inside temperature of the equipment and the outside temperature which governs the class to which the equipment belongs as prescribed in this annex (a difference of 22 °C in the case of classes A, E and I, of 32 °C in the case of classes B, F and J, of 42 °C in the case of classes C, G and K, and of 52 °C in the case of classes D, H, and L), can be achieved and maintained for not less than 12 hours.

If the results are acceptable, the equipment may be kept in service as mechanically refrigerated and heated equipment of its initial class for a further period of not more than three years.

6.5 Temperature measuring points

Temperature measuring points protected against radiation shall be placed inside the body and outside the body.

For measuring the inside temperature of the body (T_i), at least 2 temperature measuring points shall be placed inside the body at a maximum distance of 50 cm from the front wall, 50 cm from the rear door at a height of a minimum of 15 cm and a maximum of 20 cm above the floor area.

For measuring the outside temperature of the body (T_e), at least 2 temperature measuring points shall be placed:

- (i) One measuring point vertically within 20 cm around the middle height of the body, at a distance of 10 to 20 cm from the side wall, and
- (ii) Another measuring point 20 to 50 cm from the air inlet of the condenser unit.

The final reading shall be from the warmest measuring point inside the body at the end of the cool down test. The outside temperature used to determine the maximum cool down time, in case of equipment manufactured from 2 January 2012, is the average temperature of all readings from the outside measuring points until the class temperature has been reached.

6.6 Provisions common to refrigerated, mechanically refrigerated and heated equipment

- (i) If the results are not acceptable, refrigerated, mechanically refrigerated, heated, or mechanically refrigerated and heated equipment may be kept in service in its initial class only if it passes at a testing station the tests described in sections 3.1, 3.2, 3.3 and 3.4 of this appendix; it may then be kept in service in its initial class for a further period of six years.
- (ii) If the equipment consists of units of serially-produced refrigerated, mechanically refrigerated, heated, or mechanically refrigerated and heated equipment of a particular type satisfying the requirements of appendix I, paragraph 6, to this annex and belonging to one owner, then in addition to an inspection of the thermal appliances to ensure that their general condition appears to be satisfactory, the effectiveness of the cooling or heating appliances of not less than 1% of the number of units may be determined at a testing station in conformity with the provisions of sections 3.1, 3.2, 3.3 and 3.4 of this appendix. If the results of the examinations and of the determination of effectiveness are acceptable, all the equipment in question may be kept in service in its initial class for a further period of six years.

7. PROCEDURE FOR MEASURING THE CAPACITY OF MECHANICAL MULTI-TEMPERATURE REFRIGERATION UNITS AND DIMENSIONING MULTI-COMPARTMENT EQUIPMENT

7.1 Definitions

- (a) Multi-compartment equipment: Equipment with two or more insulated compartments for maintaining a different temperature in each compartment;
- (b) Multi-temperature mechanical refrigeration unit: Mechanical refrigeration unit with compressor and common suction inlet, condenser and two or more evaporators set at different temperatures in the various compartments of multi-compartment equipment;
- (c) Host unit: Refrigeration unit with or without an integral evaporator;
- (d) Unconditioned compartment: a compartment considered to have no evaporator or for which the evaporator is inactive for the purposes of dimensioning calculations and certification;
- (e) Multi-temperature operation: Operation of a multi-temperature mechanical refrigeration unit with two or more evaporators operating at different temperatures in multi-compartment equipment;
- (f) Nominal refrigerating capacity: Maximum refrigerating capacity of the refrigeration unit in mono-temperature operation with two or three evaporators operating simultaneously at the same temperature;
- (g) Individual refrigerating capacity ($P_{\text{ind-evap}}$): The maximum refrigerating capacity of each evaporator in solo operation with the host unit;
- (h) Effective refrigerating capacity ($P_{\text{eff-frozen-evap}}$): The refrigerating capacity available to the lowest temperature evaporator when two or more evaporators are each operating in multi-temperature mode, as prescribed in paragraph 7.3.5.

7.2 Test procedure for multi-temperature mechanical refrigeration units

7.2.1 General procedure

The test procedure shall be as defined in section 4 of this appendix.

The host unit shall be tested in combination with different evaporators. Each evaporator shall be tested on a separate calorimeter, if applicable.

The nominal refrigerating capacity of the host unit in mono-temperature operation, as prescribed in paragraph 7.2.2, shall be measured with a single combination of two or three evaporators including the smallest and largest.

The individual refrigerating capacity shall be measured for all evaporators, each in mono-temperature operation with the host unit, as prescribed in paragraph 7.2.3.

This test shall be conducted with two or three evaporators including the smallest, the largest and, if necessary, a mid-sized evaporator.

If the multi-temperature unit can be operated with more than two evaporators:

- The host unit shall be tested with a combination of three evaporators: the smallest, the largest and a mid-sized evaporator.
- In addition, on demand of the manufacturer, the host unit can be tested optionally with a combination of two evaporators: the largest and smallest.

The tests are done in independent mode and stand by.

7.2.2 Determination of the nominal refrigerating capacity of the host unit

The nominal refrigerating capacity of the host unit in mono-temperature operation shall be measured with a single combination of two or three evaporators operating simultaneously at the same temperature. This test shall be conducted at $-20\text{ }^{\circ}\text{C}$ and at $0\text{ }^{\circ}\text{C}$.

The air inlet temperature of the host unit shall be $+30\text{ }^{\circ}\text{C}$.

The nominal refrigerating capacity at $-10\text{ }^{\circ}\text{C}$ shall be calculated by linear interpolation from the capacities at $-20\text{ }^{\circ}\text{C}$ and $0\text{ }^{\circ}\text{C}$.

7.2.3 Determination of the individual refrigerating capacity of each evaporator

The individual refrigerating capacity of each evaporator shall be measured in solo operation with the host unit. The test shall be conducted at $-20\text{ }^{\circ}\text{C}$ and $0\text{ }^{\circ}\text{C}$. The air inlet temperature of the refrigeration unit shall be $+30\text{ }^{\circ}\text{C}$.

The individual refrigerating capacity at $-10\text{ }^{\circ}\text{C}$ shall be calculated by linear interpolation from the capacities at $0\text{ }^{\circ}\text{C}$ and $-20\text{ }^{\circ}\text{C}$.

7.2.4 Test of the remaining effective refrigerating capacities of a set of evaporators in multi-temperature operation at a reference heat load

The remaining effective refrigerating capacity shall be measured for each tested evaporator at $-20\text{ }^{\circ}\text{C}$ with the other evaporator(s) operating under control of a thermostat set at $0\text{ }^{\circ}\text{C}$ with a reference heat load of 20% of the individual refrigerating capacity at $-20\text{ }^{\circ}\text{C}$ of the evaporator in question. The air inlet temperature of the host unit shall be $+30\text{ }^{\circ}\text{C}$.

For multi-temperature refrigeration units with more than one compressor such as cascade systems or units with two-stage compression systems, where the refrigerating capacities can be simultaneously maintained in the frozen and chilled compartments, the measurement of the effective refrigerating capacity, shall be done at one additional heat load.

7.3 Dimensioning and certification of refrigerated multi-temperature equipment

7.3.1 General procedure

The refrigerating capacity demand of multi-temperature equipment shall be based on the refrigerating capacity demand of mono-temperature equipment as defined in this appendix.

For multi-compartment equipment, a K coefficient less than or equal to $0.40 \text{ W/m}^2 \cdot ^\circ\text{C}$ for the outer body as a whole shall be approved in accordance with subsections 2 to 2.2 of this appendix.

The insulation capacities of the outer body walls shall be calculated using the K coefficient of the body approved in accordance with this Agreement. The insulation capacities of the dividing walls shall be calculated using the K coefficients in the table in paragraph 7.3.7.

For issuance of an ATP certificate:

- The nominal refrigerating capacity of the multi-temperature refrigeration unit shall be at least equal to the heat loss through the outer body walls of the equipment as a whole multiplied by the factor 1.75 as specified in paragraph 3.2.6 of this appendix.
- In each compartment, the calculated remaining effective refrigerating capacity at the lowest temperature of each evaporator in multi-temperature operation shall be greater than or equal to the maximum refrigeration demand of the compartment in the most unfavourable conditions, as prescribed in paragraphs 7.3.5 and 7.3.6, multiplied by the factor 1.75 as specified in paragraph 3.2.6 of this appendix.
- The equipment should comply with the airflow requirements in cooling mode prescribed in paragraph 3.2.8.

7.3.2 Conformity of the entire body

The outer body shall have a K value $K \leq 0.40 \text{ W/m}^2 \cdot ^\circ\text{C}$.

The internal surface area of the body shall not vary by more than 20%.

The equipment shall conform to:

$$P_{\text{nominal}} > 1.75 \times K_{\text{body}} \times S_{\text{body}} \times \Delta T$$

Where:

P_{nominal} is the nominal refrigerating capacity of the multi-temperature refrigeration unit,

K_{body} is the K value of the outer body,

S_{body} is the geometric mean of the inside surface area and the outside surface area of the body

ΔT is the difference in temperature between outside and inside the body.

7.3.3 Determination of the refrigerating demand of chilled evaporators

With the dividing walls in given positions, the refrigerating capacity demand of each chilled evaporator is calculated as follows:

$$P_{\text{chilled demand}} = (S_{\text{chilled-comp}} - \sum S_{\text{bulk}}) \times K_{\text{body}} \times \Delta T_{\text{ext}} + \sum (S_{\text{bulk}} \times K_{\text{bulk}} \times \Delta T_{\text{int}})$$

Where:

K_{body} is the K value given by an ATP test report for the outer body,

$S_{\text{chilled-comp}}$ is the inside surface area of the chilled compartment for the given positions of the dividing walls,

S_{bulk} are the surface areas of the dividing walls,

K_{bulk} are the K values of the dividing walls given by the table in paragraph 7.3.7,

ΔT_{ext} is the difference in temperatures between the chilled compartment and +30 °C outside the body,

ΔT_{int} is the difference in temperatures between the chilled compartment and other compartments. For unconditioned compartments a temperature of +20 °C shall be used for calculations.

7.3.4 Determination of the refrigerating demand of frozen compartments

With the dividing walls in given positions, the refrigerating capacity demand of each frozen compartment is calculated as follows:

$$P_{\text{frozen demand}} = (S_{\text{frozen-comp}} - \sum S_{\text{bulk}}) \times K_{\text{body}} \times \Delta T_{\text{ext}} + \sum (S_{\text{bulk}} \times K_{\text{bulk}} \times \Delta T_{\text{int}})$$

Where:

K_{body} is the K value given by an ATP test report for the outer body,

$S_{\text{frozen-comp}}$ is the inside surface area of the frozen compartment for the given positions of the dividing walls,

S_{bulk} are the surface areas of the dividing walls,

K_{bulk} are the K values of the dividing walls given by the table in paragraph 7.3.7,

ΔT_{ext} is the difference in temperatures between the frozen compartment and +30 °C outside the body,

ΔT_{int} is the difference in temperatures between the frozen compartment and other compartments. For insulated compartments a temperature of +20 °C shall be used for calculations.

7.3.5 Determination of the effective refrigerating capacity of frozen evaporators

The effective refrigerating capacity, in given positions of the dividing walls, is calculated as follows:

$$P_{\text{eff-frozen-evap}} = P_{\text{ind-frozen-evap}} \times [1 - \sum (P_{\text{eff-chilled-evap}} / P_{\text{ind-chilled-evap}})]$$

Where:

$P_{\text{eff-frozen-evap}}$ is the effective refrigerating capacity of the frozen evaporator with a given configuration,

$P_{\text{ind-frozen-evap}}$ is the individual refrigeration capacity of the frozen evaporator at –20 °C,

$P_{\text{eff-chilled-evap}}$ is the effective refrigeration capacity of each chilled evaporator in the given configuration as defined in paragraph 7.3.6,

$P_{\text{ind-chilled-evap}}$ is the individual refrigerating capacity at –20 °C for each chilled evaporator.

This calculation method is only approved for multi-temperature mechanical refrigeration units with a single one-stage compressor. For multi-temperature refrigeration units with more than one compressor such as cascade systems or units with two-stage compression systems, where the refrigerating capacities can be simultaneously maintained in the frozen and the chilled compartments, this calculation method shall not be used, because it will lead to an underestimation of the effective refrigerating capacities. For this equipment, the effective refrigerating capacities shall be interpolated between the effective refrigerating capacities measured with two different heat loads given in the tests reports as prescribed in 7.2.4.

7.3.6 Conformity declaration

The equipment is declared in conformity in multi-temperature operation if, for each position of the dividing walls, and each distribution of temperature in the compartments:

$$P_{\text{eff-frozen-evap}} \geq 1.75 \times P_{\text{frozen demand}}$$

$$P_{\text{eff-chilled-evap}} \geq 1.75 \times P_{\text{chilled demand}}$$

Where:

$P_{\text{eff-frozen-evap}}$ is the effective refrigeration capacity of the considered frozen evaporator at the class temperature of the compartment in the given configuration,

$P_{\text{eff-chilled-evap}}$ is the effective refrigeration capacity of the considered chilled evaporator at the class temperature of the compartment in the given configuration,

$P_{\text{frozen demand}}$ is the refrigerating demand of the considered compartment at the class temperature of the compartment in the given configuration as calculated according to 7.3.4,

$P_{\text{chilled demand}}$ is the refrigerating demand of the considered compartment at the class temperature of the compartment in the given configuration as calculated according to 7.3.3.

It shall be considered that all the positions of the dividing walls have been dimensioned if the wall positions from the smallest to the largest compartment sizes are checked by iterative methods whereby no input step change in surface area is greater than 20 %.

A declaration of conformity shall be provided in a supplementary document to the certificate of compliance issued by the competent authority of the country of manufacture. The document shall be based on information given by the manufacturer. The declaration shall conform to the layout given in Model No. 14 of this appendix.

This document shall include at least:

- (a) A sketch showing the actual compartment configuration and evaporator arrangement;
- (b) Proof by calculation that the multi-compartment equipment meets the requirements of ATP for the user's intended degree of freedom with regards to compartment temperatures and compartment dimensions.

7.3.7 Dividing walls

Thermal losses through dividing walls shall be calculated using the K coefficients in the following table.

	<i>K coefficient – [W/m²·°C]</i>		<i>Minimum insulation thickness [mm]</i>
	<i>Fixed</i>	<i>Movable</i>	
Longitudinal – alu floor	2.0	3.0	25
Longitudinal – GRP floor	1.5	2.0	25
Transversal – alu floor	2.0	3.2	40
Transversal – GRP floor	1.5	2.6	40

K coefficients of movable dividing walls include a safety margin for specific ageing and unavoidable thermal leakages.

For specific designs with additional heat transfer caused by additional thermal bridges compared to a standard design, the partition K coefficient shall be increased.

- 7.3.8 The requirements of section 7 shall not apply to equipment produced before the entry into force of the requirements and having undergone equivalent tests as multi-temperature equipment. Equipment produced before the entry into force of this section may be operated in international transport but may only be transferred from one country to another with the agreement of the competent authorities of the countries concerned.

8. TEST REPORTS

A test report of the type appropriate to the equipment tested shall be drawn up for each test in conformity with one or other of the models 1 to 14 hereunder.

MODEL No. 1 A

Test Report

Prepared in conformity with the provisions of the Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be Used for such Carriage (ATP)

Test report No.....

Section 1

Specifications of the equipment (equipment other than tanks for the carriage of liquid foodstuffs)

Approved testing station/expert: ¹

Name

Address

Type of equipment: ²

Make Registration number Serial number

Date of first entry into service

Tare³ kg Carrying capacity³ kg

Body:

Make and type Identification number

Built by

Owned or operated by

Submitted by

Date of construction (month/year)

Principal dimensions:

Outside: length m, width m, height m

Inside: length m, width m, height m

Total floor area of body m²

Usable internal volume of body m³

MODEL No. 1 A (cont'd)

Method used ^{1,3} Figures used ^{1,3}

Total inside surface area S_i of body m²

Total outside surface area S_e of body m²

Mean surface area: $S = \sqrt{S_i \times S_e}$ m²

Specifications of the body walls: ⁴

Top

Bottom

Sides

Structural peculiarities of body: ⁵

Number,) of doors

positions) of vents

and dimensions) of ice-loading apertures

Accessories ⁶

K coefficient = W/m².°C

¹ Delete as necessary (experts only in the case of tests carried out under ATP Annex 1, Appendix 2, sections 5 or 6).

² Wagon, lorry, trailer, semitrailer, container, etc.

³ State source of information.

⁴ Nature and thickness of materials constituting the body walls, from the interior to the exterior, mode of construction, etc.

⁵ If there are surface irregularities, show how S_i and S_e were determined.

⁶ Meat bars, flettner fans, etc.

MODEL No. 1 B

Test Report

Prepared in conformity with the provisions of the Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be Used for such Carriage (ATP)

Test report No

Section 1

Specifications of tanks for the carriage of liquid foodstuffs

Approved testing station/expert: ¹

Name

Address

Type of tank: ²

Make Registration number Serial number

Date of first entry into service

Tare ³ kg Carrying capacity ³ kg

Tank:

Make and type Identification number

Built by

Owned or operated by

Submitted by

Date of construction (month/year)

Principal dimensions:

Outside: length of cylinder m, major axis m, minor axis m

Inside: length of cylinder m, major axis m, minor axis m

Usable internal volume m³

MODEL No. 1 B (cont'd)

Internal volume of each compartment m³

Total inside surface area S_i of tank m²

Inside surface area of each compartment S_{i1} , S_{i2} m²

Total outside surface area S_e of tank m²

Mean surface area of tank: $S = \sqrt{S_i \times S_e}$ m²

Specifications of the tank walls: ⁴

Structural peculiarities of the tank: ⁵

Number, dimensions and description of manholes

Description of manhole covers

Number, dimensions and description of discharge piping

Number and description of tank cradles

Accessories

¹ Delete as necessary (experts only in the case of tests carried out under ATP Annex 1, Appendix 2, sections 5 or 6).

² Wagon, lorry, trailer, semi-trailer, container, etc.

³ State source of information.

⁴ Nature and thickness of materials constituting the tank walls, from the interior to the exterior, mode of construction, etc.

⁵ If there are surface irregularities, show how S_i and S_e were determined.

MODEL No. 2 A

Section 2

Measurement in accordance with ATP, Annex 1, Appendix 2, sub-section 2.1, of the overall coefficient of heat transfer of equipment other than tanks for liquid foodstuffs

Testing method: inside cooling/inside heating ¹

Date and time of closure of equipment's doors and other openings:

Averages obtained for hours of continuous operation
(from a.m./p.m. to a.m./p.m.):

(a) Mean outside temperature of body: $T_e = \dots\dots\dots^\circ\text{C} \pm \dots\dots\dots^\circ\text{C}$

(b) Mean inside temperature of body: $T_i = \dots\dots\dots^\circ\text{C} \pm \dots\dots\dots^\circ\text{C}$

(c) Mean temperature difference achieved: $\Delta T = \dots\dots\dots^\circ\text{C}$

Maximum temperature spread:

Outside body $^\circ\text{C}$

Inside body $^\circ\text{C}$

Mean temperature of walls of body $\frac{T_e + T_i}{2}$ $^\circ\text{C}$

Operating temperature of heat exchanger ² $^\circ\text{C}$

Dew point of atmosphere outside body during continuous operation ²
..... $^\circ\text{C} \pm \dots\dots\dots^\circ\text{C}$

Total duration of test h

Duration of continuous operation h

Power consumed in exchangers: W_1 W

Portion of power absorbed by the fans entering the body: W_2 W

Overall coefficient of heat transfer calculated by the formula:

$$\text{Inside-cooling test } ^1 \quad K = \frac{W_1 - W_2}{S \times \Delta T}$$

$$\text{Inside-heating test } ^1 \quad K = \frac{W_1 + W_2}{S \times \Delta T}$$

$$K = \dots\dots\dots \text{ W/m}^2 \cdot ^\circ\text{C}$$

MODEL No. 2 A (cont'd)

Expanded uncertainty with test used ³ %
 (coverage factor $k =$ for an accepted confidence level %)

Remarks: ⁴

(To be completed only if the equipment does not have thermal appliances:)

According to the above test results, the equipment may be recognized by means of a certificate in accordance with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark IN/IR.¹

However, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1, Appendix 1, paragraph 6 (a) only for a period of not more than six years, that is until

.....

Done at:

Date of test report:

Testing Officer

¹ Delete as necessary.

² For inside-cooling test only.

³ The present provisions concerning the use of expanded uncertainty instead of the maximum error are applicable to the tests carried out after 1 January 2021

⁴ If the body is not parallelepipedic, specify the points at which the outside and inside temperatures were measured.

MODEL No. 2 B

Section 2

Measurement, in accordance with ATP Annex 1, Appendix 2, sub-section 2.2, of the overall coefficient of heat transfer of tanks for liquid foodstuffs

Testing method: inside heating

Date and time of closure of equipment's openings

Mean values obtained for hours of continuous operation
(from a.m./p.m. to a.m./p.m.):

(a) Mean outside temperature of tank: $T_e = \dots\dots\dots^\circ\text{C} \pm \dots\dots\dots^\circ\text{C}$

(b) Mean inside temperature of tank:

$$T_i = \frac{\sum S_{in} \times T_{in}}{\sum S_{in}} = \dots\dots\dots^\circ\text{C} \pm \dots\dots\dots^\circ\text{C}$$

(c) Mean temperature difference achieved: $\Delta T \dots\dots\dots^\circ\text{C}$

Maximum temperature spread:

Inside tank

Inside each compartment

Outside tank

Mean temperature of tank walls

Total duration of test

Duration of continuous operation

Power consumed in exchangers: $W_1 \dots\dots\dots\text{W}$

Portion of power absorbed by the fans entering the body: $W_2 \dots\dots\dots\text{W}$

Overall coefficient of heat transfer calculated by the formula:

$$K = \frac{W_1 + W_2}{S \times \Delta T}$$

$$K = \dots\dots\dots \text{W/m}^2\cdot^\circ\text{C}$$

MODEL No. 2 B (cont'd)

Expanded uncertainty with test used ¹ %

(coverage factor $k =$ for an accepted confidence level %)

Remarks: ²

(To be completed only if the equipment does not have thermal appliances:)

According to the above test results, the equipment may be recognized by means of a certificate in accordance with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark IN/IR. ³

However, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1, Appendix 1, paragraph 6 (a) only for a period of not more than six years, that is until

.....

Done at:

Date of test report:

Testing Officer

¹ The present provisions concerning the use of expanded uncertainty instead of the maximum error are applicable to the tests carried out after 1 January 2021

² If the tank is not parallelepipedic, specify the points at which the outside and inside temperatures were measured.

³ Delete as necessary.

MODEL No. 3

Section 2

Expert field check of the insulating capacity of equipment in service in accordance with
ATP Annex 1, Appendix 2, section 5

The check was based on test report No dated
issued by approved testing station/expert (name and address)
.....

Condition when checked:

Top

Side walls

End wall

Bottom

Doors and openings

Seals

Cleaning drainholes

Air tightness
.....

K coefficient of the equipment when new (as shown in the previous test report)
..... W/m².°C

Remarks:
.....

According to the above test results the equipment may be recognized by means of a certificate in accordance
with ATP Annex 1, Appendix 3, valid for not more than three years, with the distinguishing mark IN/IR.¹

Done at:

Date of test report:
.....

Testing Officer

¹ Delete as necessary.

MODEL No. 4 A

Section 3

Determination of the efficiency of cooling appliances of refrigerated equipment using ice or dry ice by an approved testing station in accordance with ATP Annex 1, Appendix 2, sub-section 3.1, except 3.1.3 (b) and 3.1.3 (c)

Cooling appliance:

Description of cooling appliance

Nature of refrigerant

Nominal refrigerant filling capacity specified
by manufacturer kg

Actual filling of refrigerant used for test kg

Drive independent/dependent/mains-operated ¹

Cooling appliance removable/not removable ¹

Manufacturer

Type, serial number

Date of manufacture (month/year)

Filling device (description, where situated;
attach drawing if necessary)
.....

Inside ventilation appliances:

Description (number of appliances, etc.)

Power of electric fans W

Delivery rate m³/h

Dimensions of ducts: cross-section m², length m

Air intake screen; description ¹

¹ Delete if not applicable.

MODEL No. 4 A (cont'd)

Automatic devices

Mean temperatures at beginning of test:

Inside °C ± °C

Outside °C ± °C

Dew point in test chamber °C ± °C

Power of internal heating system W

Date and time of closure of equipment's doors and other openings

Record of mean inside and outside temperatures of body and/or curve showing variation
of these temperatures with time

Remarks:

According to the above test results, the equipment may be recognized by means of a certificate in accordance
with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark
.....However, this report shall be valid as a certificate of type approval within the meaning of ATP
Annex 1, Appendix 1, paragraph 6 (a) only for a period of not more than six years, that is until
.....

Done at:

Date of test report:

Testing Officer

MODEL No. 4 B

Section 3

Determination of the efficiency of cooling appliances of refrigerated equipment with eutectic plates
by an approved testing station in accordance with ATP Annex 1, Appendix 2, sub-section 3.1,
except 3.1.3 (a) and 3.1.3 (c)

Cooling appliance:

Description

Nature of eutectic solution

Nominal eutectic solution filling capacity specified
by manufacturer kg

Latent heat at freezing temperature stated by manufacturer kJ/kg at °C

Cooling appliance removable/not removable ¹

Drive independent/dependent/mains-operated ¹

Manufacturer

Type, serial number

Date of manufacture (month/year)

Eutectic plates: Make Type

Dimensions and number of plates, where situated;
distance from walls (attach drawing)
.....

Total cold reserve stated by manufacturer for freezing
temperature of kJ to °C

Inside ventilation appliances (if any):

Description

Automatic devices

¹ Delete if not applicable.

MODEL No. 4 B (cont'd)

Mechanical refrigerator (if any):

Make Type No.

Where situated

Compressor: Make Type

Type of drive

Nature of refrigerant

Condenser

Refrigerating capacity stated by the manufacturer for the specified freezing temperature and an outside temperature of + 30 °C W

Automatic devices:

Make Type

Defrosting (if any)

Thermostat

LP pressostat

HP pressostat

Relief valve

Others

Accessory devices:

Electrical heating devices of the door joint:

Capacity by linear metre of the resistor W/m

Linear length of the resistor m

Mean temperatures at beginning of test:

Inside °C ± °C

Outside °C ± °C

Dew point in test chamber °C ± °C

MODEL No. 4 B (cont'd)

Power of internal heating system W

Date and time of closure of equipment's
doors and openings

Period of accumulation of cold h

Record of mean inside and outside temperatures of body
and/or curve showing variation of these temperatures
with time

Remarks:

According to the above test results, the equipment may be recognized by means of a certificate in accordance
with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark

However, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1,
Appendix 1, paragraph 6 (a) only for a period of not more than six years, that is until

Done at:

Date of test report:

Testing Officer

MODEL No. 4 C

Section 3

Determination of the efficiency of cooling appliances of refrigerated equipment using liquefied gases by an approved testing station in accordance with ATP Annex I, Appendix 2, sub-section 3.1, except 3.1.3 (a) and 3.1.3 (b)

Cooling appliance:

Description

Drive independent/dependent/mains-operated ¹Cooling appliance removable/not removable ¹

Manufacturer

Type, serial number

Date of manufacture (month/year)

Nature of refrigerant

Nominal refrigerant filling capacity specified
by manufacturer kg

Actual filling of refrigerant used for test kg

Description of tank

Filling device (description, where situated)

Inside ventilation appliances:

Description (number, etc.)

Power of electric fans W

Delivery rate m³/hDimensions of ducts: cross-section m², length m

Automatic devices

¹ Delete if not applicable.

MODEL No. 4 C (cont'd)

Mean temperatures at beginning of test:

Inside °C ± °C

Outside °C ± °C

Dew point in test chamber °C ± °C

Power of internal heating system W

Date and time of closure of equipment's
doors and openings

Record of mean inside and outside temperatures of body and/or curve showing
variation of these temperatures with time
.....

Remarks:
.....

According to the above test results, the equipment may be recognized by means of a certificate in accordance
with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark
.....

However, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1,
Appendix 1, paragraph 6 (a), only for a period of not more than six years, that is until
.....

Done at:

Date of test report:

Testing Officer

MODEL No. 5

Section 3

Determination of the efficiency of cooling appliances of mechanically refrigerated equipment
by an approved testing station in accordance with ATP Annex 1, Appendix 2, sub-section 3.2

Mechanical refrigerating appliances:

Drive independent/dependent/mains-operated ¹

Mechanical refrigerating appliances removable/not removable ¹

Manufacturer

Type, serial number

Date of manufacture (month/year)

Refrigerant Charge:

Refrigerant fluid: (ISO/ASHRAE designation)^{a)}

Nominal mass of refrigerant

Effective refrigerating capacity stated by manufacturer for an outside temperature of + 30 °C
and an inside temperature of:

0 °CW

-10 °C W

-20 °CW

Compressor:

Make Type

Drive: electric/thermal/hydraulic/other ¹

Description

Make Type power kW at rpm

Condenser and evaporator

Motor element of fan(s): make type number

power kW at rpm

Inside ventilation appliances:

Description (number of appliances, etc.)

Power of electric fans W

Delivery rate m³/h

Dimensions of ducts: cross-section m², length m

¹ Delete if not applicable.

^{a)} If existing

MODEL No. 5 (cont'd)

Automatic devices:

Make Type

Defrosting (if any)

Thermostat

LP pressostat

HP pressostat

Relief valve

Others

Mean temperatures at beginning of test:

Inside temperature °C ± °C

Outside temperature °C ± °C

Dew point in test chamber °C ± °C

Power of internal heating system W

Date and time of closure of equipment's
doors and other openingsRecord of mean inside and outside temperatures of body and/or curve showing variation
of these temperatures with timeTime between beginning of test and attainment
of prescribed mean inside temperature of body hRemarks:
.....According to the above test results, the equipment may be recognized by means of a certificate in accordance
with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark
.....However, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1,
Appendix 1, paragraph 6 (a), only for a period of not more than six years, that is until
.....

Done at:

Date of test report:

Testing Officer

MODEL No. 6

Section 3

Determination of the efficiency of heating appliances of heated equipment by an approved testing station in accordance with ATP Annex 1, Appendix 2, sub-section 3.3

Heating appliance:

Description

Drive independent/dependent/mains-operated ¹

Heating appliance removable/not removable ¹

Manufacturer

Type, serial number

Date of manufacture (month/year)

Where situated

Overall area of heat exchange surfaces m²

Effective power rating as specified by manufacturer kW

Inside ventilation appliances:

Description (number of appliances, etc.)

Power of electric fans W

Delivery rate m³/h

Dimensions of ducts: cross-section m², length m

Mean temperatures at beginning of test:

Inside temperature °C ± °C

Outside temperature °C ± °C

Date and time of closure of equipment's
doors and other openings

¹ Delete if not applicable.

MODEL No. 6 (cont'd)

Record of mean inside and outside temperatures of body and/or
curve showing variation of these temperatures with time

Time between beginning of test and attainment of prescribed
mean inside temperature of bodyh

Where applicable, mean heating output during test to maintain prescribed
temperature difference ² between inside and outside of body W

Remarks:

According to the above test results, the equipment may be recognized by means of a certificate in accordance
with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark

However, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1,
Appendix 1, paragraph 6 (a), only for a period of not more than six years, that is until

Done at:

Date of test report:

Testing Officer

² Increased by 35% for new equipment.

MODEL No. 7

Section 3

Determination of the efficiency of cooling and heating appliances of mechanically refrigerated and heated equipment by an approved testing station in accordance with ATP Annex 1, Appendix 2, subsection 3.4

Mechanical refrigerating appliances:

Drive independent/dependent/mains-operated¹

Mechanical refrigerating appliances removable/not removable¹

Manufacturer

Type, serial number

Date of manufacture (month/year)

Refrigerant Charge:

Refrigerant fluid: (ISO/ASHRAE designation)^{a)}

Nominal mass of refrigerant

Effective refrigerating capacity stated by manufacturer for an outside temperature of + 30 °C and an inside temperature of:

0 °C W

–10 °C W

–20 °C W

Compressor:

Make Type

Drive: electric/thermal/hydraulic/other¹

Description

Make Type power kW at rpm

Condenser and evaporator

Motor element of fan(s): make type number

power kW at rpm

^{a)} If existing

MODEL No. 7 (cont'd)

Heating appliance:

Description

Drive independent/dependent/mains-operated¹

Heating appliance removable/not removable¹

Manufacturer

Type, serial number

Date of manufacture (month/year)

Where situated

Overall area of heat exchange surfaces m²

Effective power rating as specified by manufacturer kW

Inside ventilation appliances:

Description (number of appliances, etc.)

Power of electric fans W

Delivery rate m³/h

Dimensions of ducts: cross-section m², length m

Automatic devices:

Make Type

Defrosting (if any)

Thermostat

LP pressostat

HP pressostat

Relief valve

Others

Mean temperatures at beginning of test:

Inside °C ± °C

Outside °C ± °C

Dew point in test chamber² °C ± °C

Power of internal heating system

Date and time of closure of equipment's doors and openings

Record of mean inside and outside temperatures of body and/or curve showing variation of these temperatures with time

MODEL No. 7 (cont'd)

Time between beginning of test and attainment of prescribed mean inside temperature of body h

Where applicable, mean heating output during test to maintain prescribed temperature difference³ between inside and outside of body⁴W

Remarks:

According to the above test results, the equipment may be recognized by means of a certificate in accordance with ATP Annex 1, Appendix 3, valid for a period of not more than six years, with the distinguishing mark

However, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1, Appendix 1, paragraph 6 (a), only for a period of not more than six years, that is until

Done at:

Date of test report:

Testing Officer

¹ Delete if not applicable.

² Only for cooling appliances.

³ Increased by 35% for new equipment.

⁴ Only for heating appliances.

MODEL No. 8

Section 3

Expert field check of the efficiency of cooling appliances of refrigerated equipment in service
in accordance with ATP Annex 1, Appendix 2, sub-section 6.1

The check was conducted on the basis of report No
dated, issued by approved
testing station/expert (name, address)
.....

Cooling appliance:

Description
Manufacturer
Type, serial number
Date of manufacture (month/year)
Nature of refrigerant
Nominal refrigerant filling capacity
specified by manufacturer kg
Actual filling of refrigerant used for test kg
Filling device (description, where situated)

Inside ventilation appliances:

Description (number of appliances, etc.)
Power of electric fansW
Delivery ratem³/h
Dimensions of ducts: cross-section m², length m
Condition of cooling appliance and ventilation appliances
.....
.....
Inside temperature attained °C
At an outside temperature of °C

MODEL No. 8 (cont'd)

Inside temperature of the equipment before the refrigerating appliance is started°C

Total running time of the refrigerating unit h

Time between beginning of test and attainment of prescribed
mean inside temperature of body h

Check on operation of thermostat

For refrigerated equipment with eutectic plates:

Period of operation of the cooling appliance for freezing
of the eutectic solution h

Period during which inside air temperature is maintained
after the appliance is switched off h

Remarks:
.....

According to the above test results, the equipment may be recognized by means of a certificate in accordance
with ATP Annex 1, Appendix 3, valid for a period of not more than three years, with the distinguishing mark
.....

Done at:

Date of test report:

Testing Officer

MODEL No. 9

Section 3

Expert field check of the efficiency of cooling appliances of mechanically refrigerated equipment in service in accordance with ATP Annex 1, Appendix 2, sub-section 6.2

The check was conducted on the basis of report Nodated
issued by approved testing station/expert (name, address)
.....

Mechanical refrigerating appliances:

Manufacturer

Type, serial number

Date of manufacture (month/year)

Description

Effective refrigerating capacity specified by manufacturer for an outside temperature of +30 °C
and an inside temperature of

0 °C W

–10 °C W

–20 °C W

Refrigerant Charge:

Refrigerant fluid: (ISO/ASHRAE designation) ^{a)}

Nominal mass of refrigerant

Inside ventilation appliances:

Description (number of appliances, etc.)

Power of electric fans W

Delivery rate m³/h

Dimensions of ducts: cross-section m², length m

Condition of mechanical refrigerating appliance and inside ventilation appliances

^{a)} If existing

MODEL No. 9 (cont'd)

Inside temperature attained °C

At an outside temperature of °C

and with a relative running time of %

Running time h

Check on operation of thermostat

Remarks:

.....

According to the above test results, the equipment may be recognized by means of a certificate in accordance with ATP Annex 1, Appendix 3 valid for a period of not more than three years, with the distinguishing mark

.....

Done at:

Date of test report:

Testing Officer

MODEL No. 10

Section 3

Expert field check of the efficiency of heating appliances of heated equipment in service in accordance
with ATP Annex 1, Appendix 2, sub-section 6.3

The check was conducted on the basis of report No. dated

issued by approved testing station/expert (name, address)

Mode of heating:

Description

Manufacturer

Type, serial number

Date of manufacture (month/year)

Where situated

Overall area of heat exchange surfaces m²

Effective power rating as specified by manufacturer kW

Inside ventilation appliances:

Description (number of appliances, etc.)

Power of electric fans W

Delivery rate m³/h

Dimensions of ducts: cross-section m², length m

Condition of heating appliance and inside ventilation appliances

Inside temperature attained °C

MODEL No. 10 (cont'd)

At an outside temperature of °C

and with a relative running time of %

Running time h

Check on operation of thermostat

Remarks:
.....

According to the above test results, the equipment may be recognized by means of a certificate in accordance with ATP Annex 1, Appendix 3 valid for a period of not more than three years, with the distinguishing mark

Done at:

Date of test report:

Testing Officer

MODEL No. 11

Section 3

Expert field check of the efficiency of cooling and heating appliances of mechanically refrigerated and heated equipment in service in accordance with ATP Annex 1, Appendix 2, subsection 6.4

The check was conducted on the basis of report No. dated
issued by approved testing station/expert (name, address)

Mechanical refrigerating appliances:

Manufacturer

Type, serial number

Date of manufacture (month/year)

Description

Effective refrigerating capacity stated by manufacturer for an outside temperature of + 30 °C and an inside temperature of:

0 °C W

–10 °C W

–20 °C W

Refrigerant Charge:

Refrigerant fluid: (ISO/ASHRAE designation)^{a)}

Nominal mass of refrigerant

Heating appliance:

Description

Manufacturer

Type, serial number

Date of manufacture (month/year)

Where situated

Overall area of heat exchange surfaces m²

Effective power rating as specified by manufacturer kW

Inside ventilation appliances:

Description (number of appliances, etc.)

Power of electric fans W

Delivery rate m³/h

Dimensions of ducts: crosssection m², length m

^{a)} If existing

MODEL No. 11 (cont'd)

Condition of cooling appliance, heating appliance and inside ventilation appliances

Inside temperature attained °C

At an outside temperature of °C

and with a relative running time of %

Running time h

Check on operation of thermostat

Remarks:

According to the above test results, the equipment may be recognized by means of a certificate in accordance with ATP Annex 1, Appendix 3, valid for a period of not more than three years, with the distinguishing mark

Done at:

Date of test report:

Testing Officer

MODEL No. 12

TEST REPORT

Prepared in conformity with the provisions of the Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be Used for such Carriage (ATP)

Test Report No

Determination of the effective refrigerating capacity of a refrigeration unit in accordance with section 4 of ATP Annex 1, Appendix 2

Date of testing from DD/MM/YYYY to DD/MM/YYYY

Approved testing station

Name:

Address:

Refrigeration unit presented by:

.....

(a) Technical specifications of the unit

Date of manufacture (month/year):

Make:

Type: Serial No:

Category ¹

Drive independent/dependent

Removable/not removable

Single unit/assembled components

Description:

.....

.....

MODEL No. 12 (cont'd)

Compressor: Make: Type:
 Number of cylinders: Cubic capacity:
 Nominal speed of rotation: rpm

Methods of drive ¹: electric motor, separate internal combustion engine, vehicle engine, vehicle motion, other

Compressor drive motor: ^{1, 2}

Electrical: Make: Type:
 Power: kW at rpm
 Supply voltage V Supply frequency Hz

Internal combustion engine: Make: Type:
 Number of cylinders: Cubic capacity:
 Power: kW at rpm
 Fuel:

Hydraulic motor: Make: Type:
 Method of drive:

Alternator: Make: Type:
 Method of drive: Other:

Speed of rotation: nominal speed given by the manufacturer:
 rpm
 minimum speed: rpm

Refrigerant charge

Refrigerant fluid: (ISO/ASHRAE designation) ^{a)}

Nominal mass of refrigerant

Heat exchangers		Condenser	Evaporator
Make ²			
Type (if applicable) ²			
Number of tubes			
Fin pitch (mm) ²			
Tube: nature and diameter (mm) ²			
Exchange surface area (m ²) ²			
Frontal area (m ²)			
FANS	Number		
	Number of blades per fan		
	Diameter (mm)		
	Nominal power (W) ^{2,3}		
	Total nominal output at a pressure of Pa (m ³ /h) ²		
	Method of drive		

Expansion valve: Make: Model:

Adjustable: ¹ Not adjustable: ¹

Defrosting device:

Automatic device:

^{a)} If existing

MODEL No. 12 (cont'd)(b) Test method and results:

Test method ¹: heat balance method/enthalpy difference method

In a calorimeter box of mean surface area = m²

measured value of the U-coefficient of a box

fitted with a refrigeration unit: W/°C,

at a mean wall temperature of °C.

In an item of transport equipment:

measured value of the U-coefficient of an item of transport equipment fitted with a refrigeration

unit: W/°C,

at a mean wall temperature of °C.

Method employed for the correction of the U-coefficient of the body as a function of the mean wall temperature of the body:

.....

Maximum errors of determination of:

U-coefficient of the body

refrigerating capacity of the unit

(c) Checks

Temperature regulator: Setting °C Differential °C

Functioning of the defrosting device ¹: satisfactory/unsatisfactory

Air flow volume leaving the evaporator: value measured m³/h

at a static:

- differential pressure measured between the air flows leaving and entering the evaporator of 0 Pa,

- absolute barometric air pressure of hPa.

Existence of a means of supplying heat to the evaporator for setting the thermostat between 0 and +12 °C ¹: yes/no

MODEL No. 12 (cont'd)(d) Remarks

According to the above test results, this report shall be valid as a certificate of type approval within the meaning of ATP Annex 1, Appendix 1, paragraph 6 (a) only for a period of not more than six years, that is until:

.....
.....
.....

Done at:

Date of test report:

Testing Officer

¹ Delete where applicable.

² Information indicated by the manufacturer.

³ Where applicable.

⁴ Enthalpy difference method only.

MODEL No. 13

TEST REPORT

Prepared in conformity with the special provisions of the Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be used for such carriage (ATP)

Test Report No

Determination of the effective refrigeration capacity of a refrigeration unit in accordance with Annex 1, Appendix 2, section 9 of ATP

Tests carried out from mm/dd/yyyy to mm/dd/yyyy

Approved testing station

Name:

Address:

Refrigerating unit presented by:

(a) Technical specifications of the unit:

Make/Brand

Type designation:

Type of liquefied gas:

Serial number:

Date of manufacture (month/year):.....

(The tested unit shall not have been built more than 1 year prior to ATP tests.)

Description:

.....

.....

Regulating valve (if different types of fans are used repeat information below for each type)

Make/Brand

Type:

Serial number:

Tank (if different types of fans are used repeat information below for each type)

Make/Brand

Type:

Serial number:

Capacity [l]:

Gas pressure at tank outlet:

Method of insulation:

MODEL No. 13 (cont'd)

Tank (if different types of fans are used repeat information below for each type) (cont'd)

Material of inner tank:

Material of outer tank:

Supply of liquefied gas (internal pressure, pressure by heat exchanger, pump)¹

Pressure regulator

Make/Brand:

Type:

Serial number:

Gas pressure at pressure outlet:

Supply liquefied gas line (on the test bench)

Diameter:

Length:

Material:

Number of connections:

Defrosting device (Electric / Combustion unit) ¹

Make/Brand:

Type:

Supply:

Declared heating capacity:

Regulator

Make/Brand:

Type:

Hardware version:

Software version:

Serial number:

Power supply:

Possibility for Multi-temperature operation: (yes/no) ¹

Number of compartments able to work in multi-temperatures:

MODEL No. 13 (cont'd)

HEAT EXCHANGERS		Condenser	Evaporator
Make-Type			
Number of circuits			
Number of rows			
Number of blankets			
Number of tubes			
Fin pitch [mm]			
Tube : nature and diameter [mm] ²			
Total exchange surface [m ²] ²			
Face area [m ²]			
FANS	Make-Type		
	Number		
	Blade per fan		
	Diameter [mm]		
	Power [W] ²		
	Nominal speed [rpm] ²		
	Total nominal output airflow [m ³ /h] at a pressure of 0 Pa ²		
	Method of drive (Description direct current / alternative, frequency, etc.)		

(b) Test method and results:

Test method¹: Heat balance method/enthalpy difference method

In a calorimeter box of mean surface area of = m²

Measured value of the U-value of the calorimeter box fitted with the
liquefied gas unit: W/°C

At a mean wall temperature: °C

In a transport equipment

Measured value of the U-value of the transport equipment fitted with the
liquefied gas unit: W/°C

At a mean wall temperature: °C

The formula employed for the correction of the U-value of the calorimeter box as a function of the mean wall
temperature is:

.....

Maximum errors of determination of:

U-value of the body:

Refrigerating capacity of the liquefied gas unit:

MODEL No. 13 (cont'd)

Mean air temperature at the tank outside: °C								
Electric power supply:								
Liquefied gas consumption	Electrical consumption	Pressure at the tank outlet	Temperature of the liquid at the evaporator	External temperature	Internal temperature	Heating power	Evaporator air intake temperature	Useful refrigerating capacity
[kg/h]	[Vdc] and [A]	[bar abs]	[°C]	[°C]	[°C]	[W]	[°C]	[W]

Corrected cooling capacity [W]:

(c) Checks:

Temperature regulator: Setting °C

Differential °C

Functioning of the defrosting device¹: satisfactory / unsatisfactory

Airflow volume leaving the evaporator:

Value measured: m³/h

At a pressure of Pa

At a temperature of °C

At a rotation speed of tr/min.

Minimum capacity tank:

(d) Remarks.....

.....

.....

This test report is valid for a maximum duration of six years after the date of the end of the tests.

Done at:

Date of test report:

Testing Officer

¹ Delete where applicable.

² Information indicated by the manufacturer

MODEL No. 14


Declaration of conformity for Multi Temperature – Multi compartment equipment

Supplementary document to the Certificate of Compliance as per Annex 1, appendix 2 paragraph 7.3.6

Top view sketch of the lay-out of the equipment, indicating:

- front and rear, numbering of compartments;
- lay-out of the compartments with fixed and movable dividing walls and the following dimensions in centimeters: inside dimensions of the body, thickness and lengths of the dividing walls;
- most extreme position of movable dividing walls;
- Position of the host unit(s) and evaporators;
- material of the floor.

(Example of top view sketch)

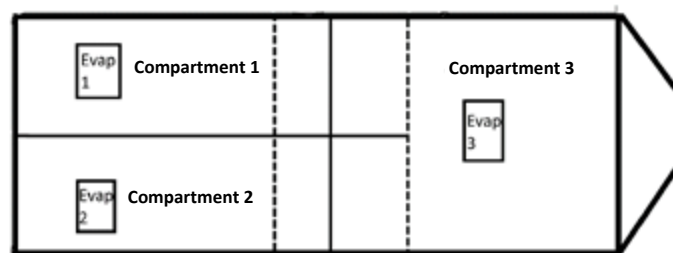

Insulated body:

ATP test report number:

Make:

Serial number:^(a)

Host unit:

ATP Test report number:

Make:

Serial number:^(a)

Evaporators:

ATP test report number:

Make:

Type:

^(a) Individual serial number or series of serial numbers.

MODEL No. 14 (cont'd)

Remarks:

(for example, limitations in compartment temperatures or dimensions, use of particular accessories as curtains etc.)

Authentication

Name of competent authority:

Address:

Telephone number:

E-mail address:

Date and Place of signature:

Stamps, signature, and name signing officer:

9. PROCEDURE FOR MEASURING THE CAPACITY OF LIQUEFIED GAS UNITS AND DIMENSIONING THE EQUIPMENT THAT USES THESE UNITS

9.1 Definitions

- (a) A liquefied gas unit is composed of a tank containing liquefied gas, a regulating system, an interconnection system, a muffler if applicable and one or more evaporator;
- (b) Primary evaporator: any minimal structure comprising a liquefied gas unit intended to absorb thermal capacity in an insulated compartment;
- (c) Evaporator: any composition made up of primary evaporators located in an insulated compartment;
- (d) Maximum nominal evaporator: any composition made up of primary evaporators located in one or more insulated compartments;
- (e) Mono-temperature liquefied gas unit: liquefied gas unit made up of a liquefied gas tank connected to a single evaporator for regulating the temperature of a single insulated compartment;
- (f) Multi-temperature liquefied gas unit: liquefied gas unit made up of a liquefied gas tank connected to at least two evaporators, each regulating the temperature of a single, distinct insulated compartment in the same multi-compartment equipment;
- (g) Mono-temperature operation: operation of a mono- or multi-temperature liquefied gas unit in which a single evaporator is activated and maintains a single compartment in mono-compartment or multi-compartment equipment;
- (h) Multi-temperature operation: operation of a multi-temperature liquefied gas unit with two or more activated evaporators that maintain two different temperatures in insulated compartments in multi-compartment equipment;
- (i) Maximum nominal refrigerating capacity ($P_{\text{max-nom}}$): the maximum specified refrigerating capacity set by the manufacturer of the liquefied gas unit;
- (j) Nominal installed refrigeration capacity ($P_{\text{nom-ins}}$): the maximum refrigeration capacity within the maximum nominal refrigerating capacity that can be provided by a given configuration of evaporators in a liquefied gas unit;
- (k) Individual refrigerating capacity ($P_{\text{ind-evap}}$): the maximum refrigerating capacity generated by each evaporator when the liquefied gas unit is operating as a mono-temperature unit;
- (l) Effective refrigerating capacity ($P_{\text{eff-frozen-evap}}$): the refrigerating capacity available to the lowest temperature evaporator when the liquefied gas unit is operating as described in paragraph 9.2.4.

9.2 Test procedure for liquefied gas units

9.2.1 General procedure

The test procedure shall be as specified in annex 1, appendix 2, section 4 of ATP, taking account of the following particularities.

The tests shall be conducted for the different primary evaporators. Each primary evaporator shall be tested on a separate calorimeter, if applicable, and placed in a temperature-controlled test cell.

For mono-temperature liquefied gas units, only the refrigeration capacity of the regulating unit with the maximum nominal capacity evaporator will be measured. A third temperature level is added in accordance with annex 1, appendix 2, paragraph 4 of ATP. The cooling capacity obtained for the third temperature level may be calculated by the testing station on the basis of an interpolation based on the results obtained during tests carried out at the $-20\text{ }^{\circ}\text{C}$ and $0\text{ }^{\circ}\text{C}$ temperature levels.

For multi-temperature liquefied gas units, the individual refrigerating capacity shall be measured for all primary evaporators, each operating in mono-temperature mode as specified in paragraph 9.2.3.

The refrigerating capacities are determined by using a liquefied gas tank provided by the manufacturer that allows a complete test to be carried out without intermediate refilling.

All the elements of the liquefied gas refrigeration unit shall be placed in a thermostatic enclosure maintained at an ambient temperature of 30 ± 0.5 °C.

For each test, the following shall also be recorded:

The flow, temperature and pressure of the liquefied gas emerging from the tank in use;

The voltage, electrical current and total electrical consumption absorbed by the liquefied gas unit (i.e. fan...);

The gas flow is equal to the mean mass consumption of fluid throughout the test in question.

Except when determining the liquefied gas flow, each quantity shall be physically captured for a fixed period equal to or less than 10 seconds and each quantity shall be recorded for a fixed maximum period of 2 minutes, subject to the following:

Each temperature recorded at the air intake of the ventilated evaporator or each air temperature recorded inside the body of the non-ventilated evaporator shall comply with the expected class temperature ± 1 °C.

If the electrical components of the liquefied gas unit can be fed by more than one electrical power supply, the tests shall be repeated accordingly.

If the tests show equivalent maximum nominal refrigerating capacities, regardless of the operating mode of the liquefied gas refrigeration unit, then the tests may be restricted to a single electrical power supply mode, taking into account the potential impact on the air flow expelled by the evaporators, where applicable. Equivalence is demonstrated if:

$$\frac{2 \times |P_{nom-max,1} - P_{nom-max,2}|}{P_{nom-max,1} + P_{nom-max,2}} \leq 0.035$$

Where:

$P_{nom-max,1}$: The maximum nominal capacity of the liquefied gas unit for a given electrical power supply mode,

$P_{nom-max,2}$: The second maximum nominal capacity of the liquefied gas unit for a different electrical power supply mode.

9.2.2 Determination of the maximum nominal refrigerating capacity of the liquefied gas unit

The test shall be conducted at reference temperatures of -20 °C and 0 °C.

The nominal refrigerating capacity at -10 °C shall be calculated by linear interpolation of the capacities at -20 °C and 0 °C.

The maximum nominal refrigerating capacity of the regulating unit in mono-temperature operation shall be measured with the maximum nominal evaporator offered by the manufacturer. This evaporator is formed of the primary refrigeration evaporator(s).

The test shall be conducted with the unit operating at a single reference temperature, corresponding to the temperature of the air intake in the case of ventilated evaporators or the temperature of the air inside the body in the case of non-ventilated evaporators.

The maximum nominal refrigerating capacity shall be estimated at each level of temperature as follows:

A first test shall be carried out, for at least four hours, under control of the thermostat (of the refrigeration unit) to stabilize the heat transfer between the interior and exterior of the calorimeter box.

After re-filling of the tank (if needed), a second test shall be carried out for at least three hours for the measurement of the maximum nominal refrigerating capacity in which:

- (a) The set point of the liquefied gas unit shall be set to the chosen test temperature with a set point shift if necessary, in accordance with the instructions of the test sponsor;
- (b) The electrical power dissipated in the calorimeter box shall be adjusted throughout the test to ensure that the reference temperature remains constant.

The refrigerating capacity drift during this second test shall be lower than a rolling average of 5% per hour and shall not exceed 10% during the course of the test. If this is the case, the refrigeration capacity obtained corresponds to the minimum refrigeration capacity recorded during the course of the test.

Only for the measurement of the maximum nominal refrigerating capacity of the liquefied gas unit, a single additional test of one hour shall be conducted with the smallest tank sold with the unit to quantify the impact of its volume on the regulation of the refrigerating capacity. The new refrigerating capacity obtained shall not vary by more than 5% from the lower value or compared to the value found with the tank used for the tests of three hours or more. Where the impact is greater, a restriction on the volume of the tank shall be included in the official test report.

9.2.3 Determination of the individual refrigerating capacity of each primary evaporator of a liquefied gas unit

The individual refrigerating capacity of each primary evaporator shall be measured in mono-temperature operation. The test shall be conducted at $-20\text{ }^{\circ}\text{C}$ and $0\text{ }^{\circ}\text{C}$, as prescribed in paragraph 9.2.2.

The individual refrigerating capacity at $-10\text{ }^{\circ}\text{C}$ shall be calculated by linear interpolation of the capacities at $-20\text{ }^{\circ}\text{C}$ and $0\text{ }^{\circ}\text{C}$.

9.2.4 Determination of the remaining effective refrigerating capacity of a liquefied gas unit in multi-temperature operation at a reference heat load

Determination of the remaining effective capacity of a liquefied gas refrigeration unit requires the simultaneous use of two or three evaporators, as follows:

- (a) For a two-compartment unit, the evaporators with the highest and lowest individual refrigerating capacities;
- (b) For a unit with three or more compartments, the same evaporators as above and as many others as needed, with intermediate refrigerating capacity.

Setting of the reference heat load:

- (a) The set points of all but one of the evaporators shall be set in such a way as to obtain an air intake temperature, or, if not applicable, an air temperature inside the body, of $0\text{ }^{\circ}\text{C}$;
- (b) A heat load shall be applied to each calorimeter/ evaporator pair under control of the thermostat, except the one not selected;
- (c) The heat load shall be equal to 20% of the individual refrigerating capacity at $-20\text{ }^{\circ}\text{C}$ of each evaporator.

The effective capacity of the remaining evaporator shall be determined at an air intake temperature, or, if not applicable, an air temperature inside the body, of $-20\text{ }^{\circ}\text{C}$.

Once the effective capacity of the remaining evaporator has been determined, the test shall be repeated after conducting a circular permutation of the temperature classes.

9.3 Refrigerating capacity of evaporators

Refrigeration evaporators can be created on the basis of refrigeration capacity tests carried out on primary evaporators. The refrigeration capacity and liquefied gas consumption of the evaporators equal the arithmetic sum of the refrigeration capacity and of the liquefied gas consumption, respectively, of the primary evaporators within the limit of the maximum nominal refrigerating capacity and of the associated flow of liquefied gas.

9.4 Dimensioning and certification of refrigerated multi-temperature liquefied gas equipment

The dimensioning and certification of refrigerated equipment using liquefied gas refrigeration units shall be carried out as prescribed in section 3.2.6 for mono-temperature equipment, with the following capacity equivalents:

$$P_{\text{nom-ins}} = P_{\text{eff}} \text{ (effective refrigerating capacity)}$$

or section 7.3 for multi-temperature refrigerating equipment, with the following capacity equivalents :

$$P_{\text{max-nom}} = P_{\text{nominal}}$$

In addition, the usable volume of liquefied gas tanks shall be such as to permit the liquefied gas unit to maintain the temperature for that class of equipment for a minimum of 12 hours.

Annex 1, Appendix 3

A. Model form of certificate of compliance of the equipment, as prescribed in Annex 1, Appendix 1, paragraph 3

FORM OF CERTIFICATE FOR INSULATED, REFRIGERATED, MECHANICALLY REFRIGERATED, HEATED OR MECHANICALLY REFRIGERATED AND HEATED EQUIPMENT USED FOR THE INTERNATIONAL CARRIAGE OF PERISHABLE FOODSTUFFS BY LAND

Certificates of compliance of equipment issued before 2 January 2011 in accordance with the requirements regarding the model of the certificate in Annex 1, Appendix 3 in force until 1 January 2011 shall remain valid until their original date of expiry.

Certificates of compliance issued before the date of entry into force of the modification to item 3 of the model certificate (30 September 2015) shall remain valid until their original date of expiry.

/ EQUIPMENT ¹																									
2	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%; text-align: center;">XXXXXXXXXX³</td> <td style="width: 15%; text-align: center;">INSULATED</td> <td style="width: 15%; text-align: center;">REFRIGERATED</td> <td style="width: 15%; text-align: center;">MECHANICALLY REFRIGERATED</td> <td style="width: 15%; text-align: center;">HEATED</td> <td style="width: 15%; text-align: center;">MECHANICALLY REFRIGERATED AND HEATED</td> <td style="width: 15%; text-align: center;">MULTI- TEMPERATURE⁴</td> </tr> </table>	XXXXXXXXXX ³	INSULATED	REFRIGERATED	MECHANICALLY REFRIGERATED	HEATED	MECHANICALLY REFRIGERATED AND HEATED	MULTI- TEMPERATURE ⁴																	
XXXXXXXXXX ³	INSULATED	REFRIGERATED	MECHANICALLY REFRIGERATED	HEATED	MECHANICALLY REFRIGERATED AND HEATED	MULTI- TEMPERATURE ⁴																			
/ CERTIFICATE ⁵ ATP XXXXXXXXXX																									
/ Issued pursuant to the Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be Used for such Carriage (ATP)																									
1.	/ Issuing authority: XX																								
2.	/ Equipment ⁶ : XXXXXXXXXXXXXXXXXXXXXXXX																								
3.	/ Registration number ^a : XXXXXXXXXX / Vehicle identification number ^a : XXXXXXXXXXXXXXXXXXXXXXXX																								
	/ allotted by: XXXXXXXXXXXXXXXXXXXXXXXX																								
	Insulated box: MAKE, MODEL, SERIAL NUMBER, MONTH AND YEAR OF MANUFACTURE ¹⁶ XXXXXXXXXXXXXXXXXXXXXXXX																								
4.	Owner or operated by: XXXXXXXXXXXXXXXXXXXXXXXX																								
5.	/ Submitted by: XXXXXXXXXXXXXXXXXXXXXXXX																								
6.	/ Is approved as: ⁷ XXXXXXXXXXXXXXXXXXXXXXXX																								
6.1	/ With one or more thermal appliances which is (are) ¹ :																								
6.1.1	/ Independent; ⁸ MAKE, MODEL, REFRIGERANT, SERIAL NUMBER/YEAR OF MANUFACTURE (If any)																								
6.1.2	/ Dependent; ⁸ MAKE, MODEL, REFRIGERANT, SERIAL NUMBER/YEAR OF MANUFACTURE (If any)																								
6.1.3	/ Removable;																								
6.1.4	/ Not removable.																								
7.	/ Basis of issue of certificate:																								
7.1	/ This certificate is issued on the basis of: ¹																								
7.1.1	/ Tests of the equipment;																								
7.1.2	/ conformity with a reference item of equipment;																								
7.1.3	/ A periodic inspection.																								
7.2	/ Specify:																								
7.2.1	XXX																								
7.2.2	XXX																								
7.2.3	XXX																								
	/ The number(s) of the report(s):																								
	NNNNNNN (TESTING STATION) YYYY/MM/DD and NNNNNNN (TESTING STATION) YYYY/MM/DD																								
7.2.4	/ The K coefficient: 0.nn W/m ² .°C ¹²																								
7.2.5	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;"></td> <td style="width: 15%;">Nominal capacity</td> <td style="width: 15%;">Evap.1</td> <td style="width: 15%;"></td> <td style="width: 15%;">Evap.2</td> <td style="width: 15%;">Evap.3</td> </tr> <tr> <td>°C</td> <td>XXXX W</td> <td>XXXX W</td> <td></td> <td>XXXX W</td> <td>XXXX W</td> </tr> <tr> <td>°C</td> <td>XXXX W</td> <td>XXXX W</td> <td></td> <td>XXXX W</td> <td>XXXX W</td> </tr> <tr> <td>°C</td> <td>XXXX W</td> <td>XXXX W</td> <td></td> <td>XXXX W</td> <td>XXXX W</td> </tr> </table>		Nominal capacity	Evap.1		Evap.2	Evap.3	°C	XXXX W	XXXX W		XXXX W	XXXX W	°C	XXXX W	XXXX W		XXXX W	XXXX W	°C	XXXX W	XXXX W		XXXX W	XXXX W
	Nominal capacity	Evap.1		Evap.2	Evap.3																				
°C	XXXX W	XXXX W		XXXX W	XXXX W																				
°C	XXXX W	XXXX W		XXXX W	XXXX W																				
°C	XXXX W	XXXX W		XXXX W	XXXX W																				
7.2.6	The effective refrigerating capacity at an outside temperature of 30 °C and an inside temperature of: ¹⁰ XX air changes/hour ¹¹																								
7.3	/ Number of openings and special equipment X																								
7.3.1	/ Number of doors: X / rear door X side door(s) X																								
7.3.2	/ Number of vents: X																								
7.3.3	/ Hanging meat equipment: X																								
7.4	/ Others																								
8.	/ This certificate is valid until: MONTH & YEAR																								
8.1	/ Provided that:																								
8.1.1	/ The insulated body and, where applicable, the thermal appliance is maintained in good condition; and																								
8.1.2	/ No material alteration is made to the thermal appliances;																								
9.	/ Done by: XXXXXXXXXXXXXXXXXXXXXXXX																								
	XXXXXXXXXXXXXXXXXXXXX																								
	XXXXXXXXXXXXXXXXXXXXX																								
	XXXXXXXXXXXXXXXXXXXXX																								
10.	/ On: YYYY/MM/DD																								
CERTIFIED DUPLICATE¹³ Do not print this stamp on the original Certificate (Officer name) (Competent or authorized authority)																									
LOGOTYPE¹⁴ Security stamp (relief, ultraviolet, etc.) Original document																									
/ The competent authority XXXXXXXXXXXXXXXXXXXXXXXXXXXXX ¹⁵ / Responsible for the ATP (Officer name)																									
a	/ Not mandatory																								


These footnotes shall not be printed on the certificate itself.

The areas in grey shall be replaced by the translation in the language of the country issuing the ATP Certificate.

- ¹ *Strike out what does not apply.*
- ² *Distinguishing sign of the country, as used in international road traffic.*
- ³ *The number (figures, letters, etc.) indicating the authority issuing the certificate and the approval reference.*
- ⁴ *Multi-temperature equipment is insulated equipment with two or more compartments for different temperatures in each compartment. For multi-temperature equipment a declaration of conformity (see 7.3.6 of annex 1, appendix 2) shall be carried in addition to the ATP certificate.*
- ⁵ *The blank certificate shall be printed in the language of the issuing country and in English, French or Russian; the various items shall be numbered as in the above model.*
- ⁶ *State type (wagon, lorry, trailer, semi-trailer, container, etc.); in the case of tank equipment for carriage of liquid foodstuffs, add the word "tank".*
- ⁷ *Enter here one or more of the descriptions listed in Appendix 4 of Annex 1, together with the corresponding distinguishing mark or marks.*
- ⁸ *Write the make, model, refrigerant, serial number and year of manufacture of the equipment.*
- ⁹ *Measurement of the overall coefficient of heat transfer, determination of the efficiency of cooling appliances, etc.*
- ¹⁰ *Where determined in conformity with the provisions of Appendix 2, paragraph 3.2 of this Annex.*
- ¹¹ *Where XX is the number of air changes per hour calculated by dividing the total airflow of the circulation fans by the total internal volume of the equipment. In the case of multi-compartment equipment with movable bulkheads, the total airflow of the circulation fans has to be divided by the maximum internal volume of each compartment.*
- ¹² *The effective cooling capacity of each evaporator depends on the number of evaporators fixed at the condensing unit.*
- ¹³ *In case of loss, a new Certificate can be provided or, instead of it, a photocopy of the ATP Certificate bearing a special stamp with "CERTIFIED DUPLICATE" (in red ink) and the name of the certifying officer, signature, and the name of the competent authority or authorized body.*
- ¹⁴ *Security stamp (relief, fluorescent, ultraviolet, or other safety mark that certifies the origin of the certificate).*
- ¹⁵ *If applicable, mention the way the power for issuing ATP Certificates is delegated.*
- ¹⁶ *Write the mark, model, serial number of the manufacturer and month and year of manufacture of the insulated body. All the serial numbers of insulated equipment (containers) having an internal volume of less than 2 m³ shall be listed. It is also acceptable to collectively list these numbers, i.e. from number ... to number.*

B. Certification plate of compliance of the equipment, as provided for in Annex 1, Appendix 1, paragraph 3

1. The certification plate shall be affixed to the equipment permanently and in a clearly visible place adjacent to any other approval plate issued for official purposes. The plate, conforming to the model reproduced below, shall take the form of a rectangular, corrosion-resistant and fire-resistant plate measuring at least 160 mm by 100 mm. The following particulars shall be indicated legibly and indelibly on the plate in at least the English or French or Russian language:
 - (a) The Latin letters "ATP" followed by the words "APPROVED FOR TRANSPORT OF PERISHABLE FOODSTUFFS";
 - (b) "APPROVAL NUMBER" followed by the distinguishing sign (in international road traffic) of the State in which the approval was granted and the number (figures, letters, etc.) of the approval reference;
 - (c) "EQUIPMENT NUMBER" followed by the individual number assigned to identify the particular item of equipment (which may be the manufacturer's number);
 - (d) "ATP MARK" followed by the distinguishing mark prescribed in annex I, appendix 4, corresponding to the class and the category of the equipment;
 - (e) "VALID UNTIL" followed by the date (month and year) when the approval of the unit of equipment expires. If the approval is renewed following a test or inspection, the subsequent date of expiry may be added on the same line.
2. The letters "ATP" and the letters of the distinguishing mark should be approximately 20 mm high. Other letters and figures should not be less than 5 mm high.

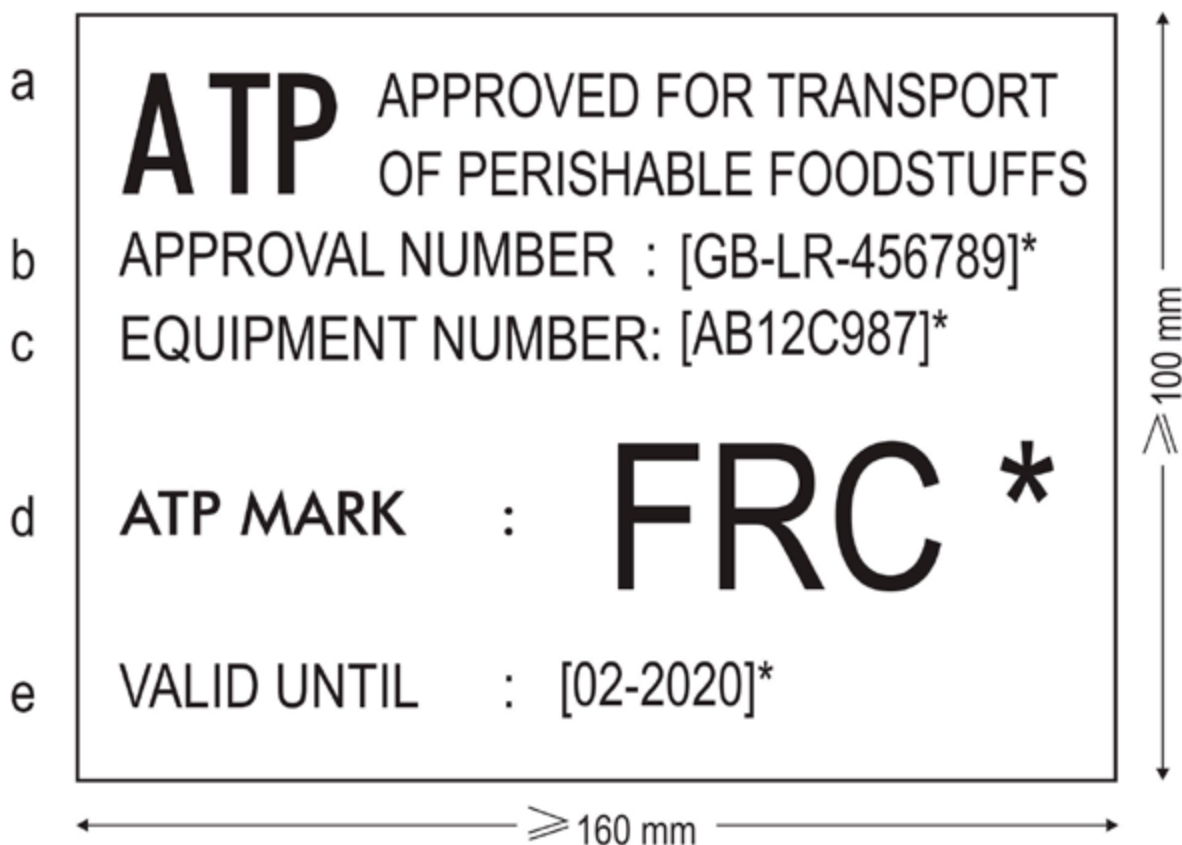

* The particulars in square brackets are given by way of example.

Annex 1, Appendix 4

DISTINGUISHING MARKS TO BE AFFIXED TO SPECIAL EQUIPMENT

The distinguishing marks prescribed in appendix 1, paragraph 4 to this annex shall consist of capital Latin letters in dark blue on a white ground. The height of the letters shall be at least 100 mm for the classification marks and at least 50 mm for the expiry dates. For special equipment, such as a laden vehicle with maximum mass not exceeding 3.5 t, the height of the classification marks could likewise be 50 mm and at least 25 mm for the expiry dates.

The classification and expiry marks shall at least be affixed externally on both sides in the upper corners near the front.

The marks shall be as follows:

Equipment	Distinguishing mark
Normally insulated equipment	IN
Heavily insulated equipment	IR
Class A refrigerated equipment with normal insulation	RNA
Class A refrigerated equipment with heavy insulation	RRA
Class B refrigerated equipment with heavy insulation	RRB
Class C refrigerated equipment with heavy insulation	RRC
Class D refrigerated equipment with normal insulation	RND
Class D refrigerated equipment with heavy insulation	RRD
Class A mechanically refrigerated equipment with normal insulation	FNA
Class A mechanically refrigerated equipment with heavy insulation	FRA
Class B mechanically refrigerated equipment with heavy insulation	FRB
Class C mechanically refrigerated equipment with heavy insulation	FRC
Class D mechanically refrigerated equipment with normal insulation	FND
Class D mechanically refrigerated equipment with heavy insulation	FRD
Class E mechanically refrigerated equipment with heavy insulation	FRE
Class F mechanically refrigerated equipment with heavy insulation	FRF
Class A heated equipment with normal insulation	CNA
Class A heated equipment with heavy insulation	CRA
Class B heated equipment with heavy insulation	CRB
Class C heated equipment with heavy insulation	CRC
Class D heated equipment with heavy insulation	CRD
Class A mechanically refrigerated and heated equipment with normal insulation	BNA

Equipment	Distinguishing mark
Class A mechanically refrigerated and heated equipment with heavy insulation	BRA
Class B mechanically refrigerated and heated equipment with heavy insulation	BRB
Class C mechanically refrigerated and heated equipment with heavy insulation	BRC
Class D mechanically refrigerated and heated equipment with heavy insulation	BRD
Class E mechanically refrigerated and heated equipment with heavy insulation	BRE
Class F mechanically refrigerated and heated equipment with heavy insulation	BRF
Class G mechanically refrigerated and heated equipment with heavy insulation	BRG
Class H mechanically refrigerated and heated equipment with heavy insulation	BRH
Class I mechanically refrigerated and heated equipment with heavy insulation	BRI
Class J mechanically refrigerated and heated equipment with heavy insulation	BRJ
Class K mechanically refrigerated and heated equipment with heavy insulation	BRK
Class L mechanically refrigerated and heated equipment with heavy insulation	BRL

In the case of multi-compartment road equipment divided in two compartments the equipment mark shall consist in the distinguishing marks of each compartment (example: FRC-FRA) starting with the compartment located at the front or on the left side of the equipment.

In the case of other multi-compartment equipment, the distinguishing mark shall be selected only for the highest ATP class, i.e. the class that permits the highest difference between inside and outside temperatures, and supplemented by the letter M (example: FRC-M).

This marking is mandatory for all equipment built from 1 October 2020.

If the equipment is fitted with a removable or dependent thermal appliance and if special conditions exist for the use of the thermal appliance, the distinguishing mark or marks shall be supplemented by the letter X in the following cases:

1. FOR REFRIGERATED EQUIPMENT:
Where the eutectic plates have to be placed in another chamber for freezing;
2. FOR MECHANICALLY REFRIGERATED EQUIPMENT AND MECHANICALLY REFRIGERATED AND HEATED EQUIPMENT:
 - 2.1 Where the compressor is powered by the vehicle engine;
 - 2.2 Where the refrigeration or refrigeration-heating unit itself or a part is removable, which would prevent its functioning.

The date (month, year) entered under section A, item 8 in appendix 3 of this annex as the date of expiry of the certificate issued in respect of the equipment shall be quoted under the distinguishing mark or marks aforesaid.

Model:

FRC 02 2020

02 = month (February)) of expiry of the
2020 = year) certificate

Annex 2

SELECTION OF EQUIPMENT AND TEMPERATURE CONDITIONS
TO BE OBSERVED FOR THE CARRIAGE OF QUICK
(DEEP)-FROZEN AND FROZEN FOODSTUFFS

1. For the carriage of the following quick (deep)-frozen and frozen foodstuffs, the transport equipment has to be selected and used in such a way that during carriage the highest temperature of the foodstuffs at any point of the load does not exceed the indicated temperature.

By that means the equipment used for the transport of quick-frozen foodstuffs shall be fitted with the device referred to in appendix 1 to this annex. If however one should proceed to the verification of the temperature of the foodstuff, this shall be done according to the procedure laid down in appendix 2 to this annex.

2. Accordingly, the temperature of the foodstuffs at any point in the load must be at or below the indicated value on loading, during carriage and on unloading.
3. Where it is necessary to open the equipment, e.g. to carry out inspections, it is essential to ensure that the foodstuffs are not exposed to procedures or conditions contrary to the objectives of this annex and those of the International Convention on the Harmonization of Frontier Controls of Goods.
4. During certain operations, such as defrosting the evaporator of mechanically refrigerated equipment, a brief rise of the temperature of the surface of the foodstuffs of not more than 3 °C in a part of the load, e.g. near the evaporator, above the appropriate temperature may be permitted.

Ice cream.....	–20 °C
Frozen or quick (deep)-frozen fish, fish products, molluscs and crustaceans and all other quick (deep)-frozen foodstuffs.....	–8 °C
All other frozen foodstuffs (except butter).....	–12 °C
Butter.....	–10 °C

Deep-frozen and frozen foodstuffs mentioned below to be immediately further processed at destination: ¹

- Butter
- Concentrated fruit juice

¹ The deep-frozen and frozen foodstuffs listed, when intended for immediate further processing at destination, may be permitted gradually to rise in temperature during carriage so as to arrive at their destination at temperatures no higher than those specified by the sender and indicated in the transport contract. This temperature should not be higher than the maximum temperature authorized for the same foodstuff when refrigerated as mentioned in annex 3. The transport document shall state the name of the foodstuff, whether it is deep-frozen or frozen and that it is immediately to be further processed at destination. This carriage shall be undertaken with ATP-approved equipment without use of a thermal appliance to increase the temperature of the foodstuffs.

Annex 2, Appendix 1

MONITORING OF AIR TEMPERATURE FOR TRANSPORT OF QUICK-FROZEN PERISHABLE FOODSTUFFS

The transport equipment shall be fitted with an instrument capable of measuring and recording air temperatures and storing the data obtained (hereinafter referred to as the instrument) to monitor the air temperatures to which quick-frozen foodstuffs intended for human consumption are subjected.

The instrument shall be verified in accordance with EN 13486:2002 by an accredited body and the documentation shall be available for the approval of ATP competent authorities.

The instrument shall comply with standard EN 12830:2018.

Temperature recorders in service that comply with EN 12830:1999 may continue to be used.

Temperature recordings obtained in this manner must be dated and stored by the operator for at least one year or longer, according to the nature of the food.

Annex 2, Appendix 2

PROCEDURE FOR THE SAMPLING AND MEASUREMENT OF TEMPERATURE FOR CARRIAGE OF CHILLED, FROZEN AND QUICK-FROZEN PERISHABLE FOODSTUFFS

A. GENERAL CONSIDERATIONS

1. Inspection and measurement of temperatures stipulated in annexes 2 and 3 should be carried out so that the foodstuffs are not exposed to conditions detrimental to the safety or quality of the foodstuffs. Measuring of food temperatures should be carried out in a refrigerated environment, and with the minimum delays and minimum disruption of transport operations.
2. Inspection and measurement procedures, as referred to in paragraph 1, shall preferably be carried out at the point of loading or unloading. These procedures should not normally be carried out during transport, unless serious doubt exists about the conformity of the temperatures of the foodstuffs stipulated in annexes 2 and 3.
3. Where possible, the inspection should take account of information provided by temperature monitoring devices during the journey before selecting those loads of perishable foodstuffs for sampling and measurement procedures. Progression to temperature measurement of the food should only be undertaken where there is reasonable doubt of the temperature control during carriage.
4. Where loads have been selected, a non-destructive measurement (between case or between pack) should at first be used. Only where the results of the non-destructive measurement do not conform with the temperatures laid down in annexes 2 or 3 (taking into account allowable tolerances), are destructive measurements to be carried out. Where consignments or cases have been opened for inspection, but no further action has been taken, they should be resealed giving the time, date, place of inspection, and the official stamp of the inspection authority.

B. SAMPLING

5. The types of package selected for temperature measurement shall be such that their temperature is representative of the warmest point of the consignment.
6. Where it is necessary to select samples during transport whilst the consignment is loaded, two samples should be taken from the top and bottom of the consignment adjacent to the opening edge of each door or pair of doors.
7. Where samples are taken during unloading of the consignment, four samples should be chosen from any of the following locations:
 - top and bottom of the consignment adjacent to the opening edge of the doors;
 - top rear corners of the consignment (i.e. furthest away from the refrigeration unit);
 - centre of the consignment;
 - centre of the front surface of the consignment (i.e. closest to the refrigeration unit);
 - top or bottom corners of the front surface of the consignment (i.e. closest to the return air intake of the refrigeration unit).
8. In the case of chilled foods in annex 3, samples should also be taken from the coldest location to ensure that freezing has not occurred during transportation.

C. TEMPERATURE MEASUREMENT OF PERISHABLE FOODSTUFFS

9. The temperature measuring probe should be precooled to as close to the product temperature as possible before measurement.

I. Chilled foods

10. Non-destructive measurement. Measurement between-case or between-pack should be made with a probe with a flat head, which gives a good surface contact, low thermal mass, and high thermal conductivity. When placing the probe between the cases or food packs, there should be sufficient pressure to give a good thermal contact, and sufficient length of probe inserted to minimize conductivity errors.
11. Destructive measurement. A probe with a rigid, robust stem and sharpened point should be used, made from a material which is easy to clean and disinfect. The probe should be inserted into the centre of the food pack, and the temperature noted when a steady reading is reached.

II. Frozen and quick-frozen foods

12. Non-destructive measurement. Same as paragraph 10.
13. Destructive measurement. Temperature probes are not designed to penetrate frozen foods. Therefore, it is necessary to make a hole in the product in which to insert the probe. The hole is made by a precooled product penetration instrument, which is a sharp pointed metallic instrument such as an ice punch, hand drill or an auger. The diameter of the hole should provide a close fit to that of the probe. The depth to which the probe is inserted will depend on the type of product:
- (i) Where product dimensions allow, insert the probe to a depth of 2.5 cm from the surface of the product;
 - (ii) Where (i) is not possible because of the size of the product, the probe should be inserted to a minimum depth from the surface of 3 to 4 times the diameter of the probe;
 - (iii) It is not possible or practical to make a hole in certain foods because of their size or composition e.g. diced vegetables. In these cases, the internal temperature of the food package should be determined by insertion of a suitable sharp-stemmed probe to the centre of the pack to measure the temperature in contact with the food.

After inserting the probe, the temperature should be read when it has reached a steady value.

D. GENERAL SPECIFICATIONS FOR THE MEASURING SYSTEM

14. The measuring system (probe and read-out) used in determining temperature shall meet the following specifications:
- (i) the response time should achieve 90% of the difference between the initial and final reading within three minutes;
 - (ii) the system must have an accuracy of ± 0.5 °C within the measurement range -20 °C to $+ 30$ °C;¹
 - (iii) the measuring accuracy must not change by more than 0.3 °C during operation in the ambient temperature range -20 °C to $+ 30$ °C;¹
 - (iv) the display resolution of the instrument should be 0.1 °C;
 - (v) the accuracy of the system should be checked at regular intervals;¹
 - (vi) the system should have a current certificate of calibration from an approved institution;

¹ The procedure will be defined.

- (vii) the electrical components of the system should be protected against undesirable effects due to condensation of moisture;
- (viii) the system should be robust and shock proof.

E. ALLOWABLE TOLERANCES IN THE MEASUREMENT OF TEMPERATURE

15. Certain tolerances should be allowed in the interpretation of temperature measurements:

- (i) operational - in the case of frozen and quick-frozen foods, a brief rise of up to 3 °C on the temperature permitted in annex 2 is allowed for the surface temperature of the food;
- (ii) methodology - non-destructive measurement can give up to a maximum of 2°C difference in the reading compared to the true product temperature measurement, especially with the thickness of cardboard in case packaging. This tolerance does not apply to the destructive measurement of temperature.

Annex 3

SELECTION OF EQUIPMENT AND TEMPERATURE CONDITIONS TO BE OBSERVED FOR THE CARRIAGE OF CHILLED FOODSTUFFS

1. For the carriage of the following chilled foodstuffs, the transport equipment has to be selected and used in such a way that during carriage the highest temperature of the foodstuffs at any point of the load does not exceed the indicated temperature. If, however, the verification of the temperature of the foodstuff is carried out, it shall be done according to the procedure laid down in Appendix 2 to Annex 2 to this Agreement.
2. Accordingly, the temperature of the foodstuffs at any point in the load must not exceed the temperature as indicated below on loading, during carriage and on unloading.
3. Where it is necessary to open the equipment, e.g. to carry out inspections, it is essential to ensure that the foodstuffs are not exposed to procedures or conditions contrary to the objectives of this Annex and those of the International Convention on the Harmonization of Frontier Controls of Goods.
4. The temperature control of foodstuffs specified in this Annex should be such as not to cause freezing at any point of the load.

		<i>Maximum temperature</i>
I.	Raw milk	+ 6 °C
II.	Red meat and large game (other than red offal)	+ 7 °C
III.	Meat products, pasteurized milk, butter, fresh dairy products (yoghurt, kefir, cream and fresh cheese), ready cooked foodstuffs (meat, fish, vegetables), ready to eat prepared raw vegetables and vegetable products, concentrated fruit juice and fish products ³ not listed below	Either at + 6 °C or at temperature indicated on the label and/or on the transport documents
IV.	Game (other than large game), poultry ² and rabbits	+ 4 °C
V.	Red offal ²	+ 3 °C
VI.	Minced meat ²	Either at +2 °C or at temperature indicated on the label and/or on the transport documents
VII.	Untreated fish, molluscs and crustaceans	On melting ice or at temperature of melting ice

ATP as amended on 22 June 2024

The Agreement on the International Carriage of Perishable Foodstuffs and on the Special Equipment to be Used for such Carriage (ATP) done at Geneva on 1 September 1970 entered into force on 21 November 1976.

The Agreement and its annexes have been regularly amended and updated since their entry into force by the Working Party on the Transport of Perishable Foodstuffs (WP.11) of the Economic Commission for Europe's Inland Transport Committee.

At the time of publishing, the Contracting Parties to ATP are Albania, Andorra, Armenia, Austria, Azerbaijan, Belarus, Belgium, Bosnia and Herzegovina, Bulgaria, Croatia, Czechia, Denmark, Estonia, Finland, France, Georgia, Germany, Greece, Hungary, Ireland, Islamic Republic of Iran, Italy, Kazakhstan, Kyrgyzstan, Latvia, Lithuania, Luxembourg, Monaco, Montenegro, Morocco, Netherlands, North Macedonia, Norway, Poland, Portugal, Republic of Moldova, Romania, Russian Federation, San Marino, Saudi Arabia, Serbia, Slovakia, Slovenia, Spain, Sweden, Tajikistan, Tunisia, Türkiye, Ukraine, United Kingdom of Great Britain and Northern Ireland, United States of America and Uzbekistan.

ATP applies to transport operations performed on the territory of at least two of the above-mentioned Contracting Parties. In addition, a number of countries have also adopted ATP as the basis for their national legislation.

Information Service
United Nations Economic Commission for Europe

Palais des Nations
CH - 1211 Geneva 10, Switzerland
Telephone: +41(0)22 917 12 34
E-mail: unece_info@un.org
Website: <http://www.unece.org>

ISBN: 978-92-1-139227-2

